

ACCESSORIES FOR  
**STEEL DOOR**



THE ULTIMATE MODERN

# STRENGTH, DURABILITY, AND SAFETY



## INTRODUCTION

Steel Door is the door of choice whenever the ultimate strength, durability, and safety are expected. A good steel door, however, won't function optimally if it isn't supported by dependable steel door accessories.

DEKSON and ISEO, combines their expertise in manufacturing high quality architectural hardwares to ensure that your steel doors work perfectly, especially in emergency condition where quality directly translates to saving lives.

# TABLE OF CONTENT

<u><b>3</b></u>	<b>SINGLE LEAF STEEL DOOR PANIC FUNCTION</b>
<u><b>5</b></u>	<b>DOUBLE LEAF STEEL DOOR</b>
<u><b>7</b></u>	<b>NON PANIC FUNCTION STEEL DOOR</b>
<u><b>9</b></u>	<b>APPLICATION SET</b>
<u><b>11</b></u>	<b>SHAFT DOOR</b>
<u><b>13</b></u>	<b>INDEX</b>

## CERTIFICATES




UNIT PELAKSANA TEKNIK LABORATORIUM  
KEBAKARAN DAN PENYELAMATAN



# SINGLE LEAF STEEL DOOR PANIC FUNCTION

Our Panic Door accessories adhere to the latest panic exit devices standardization and certification.

ISEO accessories in particular complies to the stricter safety standard of European Union.  
*Refer the number to the index section (page 4) for detailed product specification.*

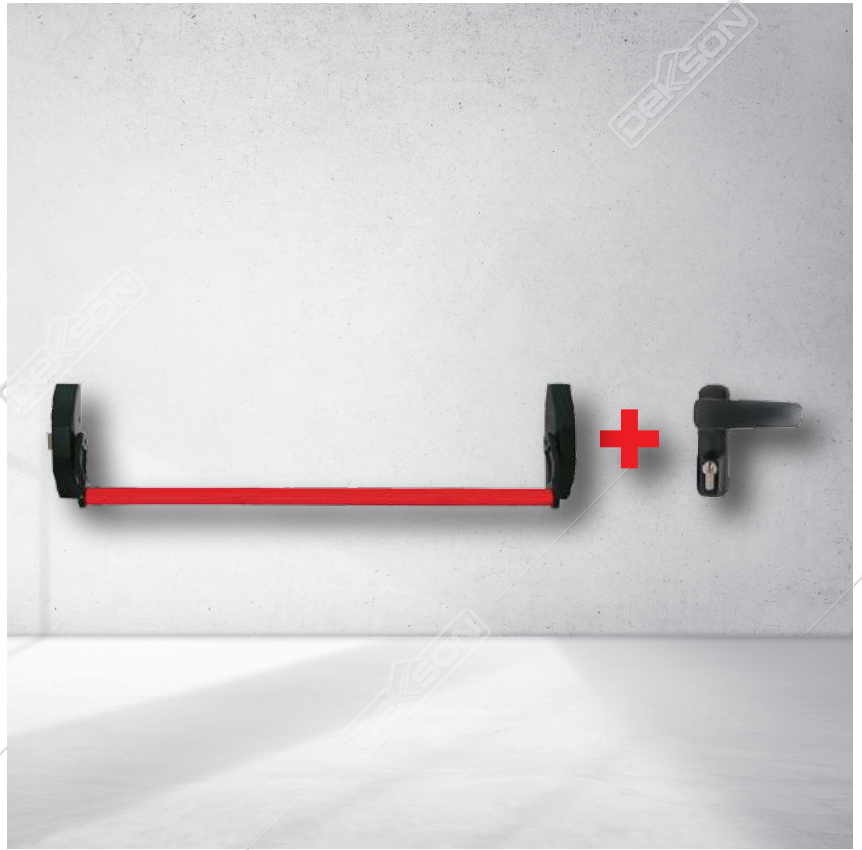

## SINGLE STEEL DOOR (PANIC FUNCTION) WITH BAR



### Inside

- use Panic Exit Device with Bar (Rimlock)

### Outside

- use Handle & Key and Door Closer

## SINGLE STEEL DOOR (PANIC FUNCTION) WITH BAR AND 2 POINT BOLT




### Inside

- use Panic Exit Device with  
2 Point Bolt or Push Bar 2 Point

### Outside

- use Handle & Key and Door Closer

## SINGLE STEEL DOOR (PANIC FUNCTION) WITH BAR AND MORTISE

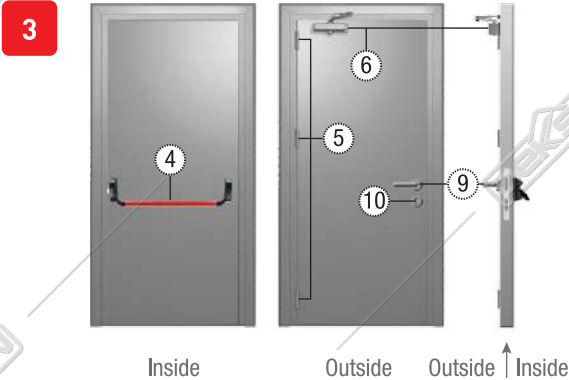

### Inside

- use Panic Exit Device with Mortise

### Outside

- use Regular Handle and Door Closer

## SINGLE STEEL DOOR (PANIC FUNCTION) WITH MORTISE LOCK



### Inside and Outside

- use Regular Handle with Panic Mortise Lock and Door Closer

\*For further information consult the dedicated pages 13-14

**MINI INDEX**

#### 1 PANIC EXIT DEVICES WITH BAR AND SINGLE POINT

- ISEO Base Panic EXIT 941400504 (Black)+Bar 945928 (Red)
- ISEO Single Point Idea 9411113774A (Metallic Grey)
- ISEO Push Panic 94211758T (Black)
- DEKKSON Single Point PD0701 Black/Red

#### 2 PANIC EXIT DEVICES WITH BAR AND 2 POINT BOLT

- ISEO 2 Point 9432999594 (Black) + Bar 945928 (Red) + Rod 94399205
- ISEO 2 Point Idea 9432083774 (Metallic Grey)
- ISEO Push 2 Point Bolt 9452117584 + 94300205
- DEKKSON 2 Point PD0702 Black/Red

#### 4 PANIC EXIT DEVICE WITH BAR AND MORTISE

- ISEO Palmo 949000050379 + MTS
- DEKKSON PD8700 + MTS + HDL Black/Red

#### 5 HINGE

##### STAINLESS STEEL SUS 304

- DEKKSON ESS DL 4x3x3 mm 2BB NRP SSS
- DEKKSON ESS DL 4,5x4x3mm 2BB SSS
- DEKKSON ESS DL 4x4x3mm 2BB SSS
- DEKKSON ESS DL 5x3x3mm 4BB NRP SSS

##### GALVANIZES

- DEKKSON ES IR 34x90 - 39x90 GALV
- DEKKSON ES IR 64x90 - 39x90 GALV

#### 6 DOOR CLOSER

- DEKKSON DCL 525 NHO Fire-rated (40-100 kg)
- DEKKSON DCL 105 NHO (100 kg)
- DEKKSON DCL 1557 NHO NA (150 kg)
- DEKKSON DCL 8916 NHO NA (150 kg)

#### 7 TRIM FOR PANIC EXIT DEVICE (HANDLE AND KEY)

##### Trim External Control :

- ISEO 94011005T (Black)
- ISEO 94011007T (Metallic Grey)
- DEKKSON PD0701 Black

#### 9 HANDLE + KNOB SSS

- ISEO LHSR Curve Ø22mm
- DEKKSON LHSR 016 Ø22mm + KNOB

##### HANDLE STAINLESS STEEL

- ISEO LHSR Curve Ø22mm
- DEKKSON LHSR 016 Ø22mm
- ISEO LHTR Curve Ø22mm
- DEKKSON LHTR 016 Ø22mm

#### 10 CYLINDER

##### A. DOUBLE CYLINDER

- DEKKSON Double Cylinder
- DEKKSON DC 70mm
- DEKKSON DC 80mm
- ISEO Double Cylinder R6
- 880935359 (70mm) SN
- 880940409 (80mm) SN

- ISEO Double Cylinder F5
- 820935359 (70mm) SN
- ISEO Double Cylinder F6
- 810935359 (70mm) SN
- 810935359 (80mm) SN

##### B. HALF CYLINDER

- DEKKSON HC 40mm
- DEKKSON HC 50mm

#### 11 MORTISE LOCK PANIC FUNCTION


- DEKKSON MTS HD IL DL8672 PANIC SSS

##### MORTISE LOCK NON PANIC FUNCTION

- DEKKSON MTS HD IL DL8672 SSS

# DOUBLE LEAF STEEL DOOR PANIC FUNCTION

If the double steel door is located on strategic area where a lot of people are anticipated to pass through it in emergency event, it is recommended to install panic exit device on both door leaf. If not, installing panic exit device only on the active door is acceptable.  
**Refer the number to the index section (page 7-8) for detailed product specification.**

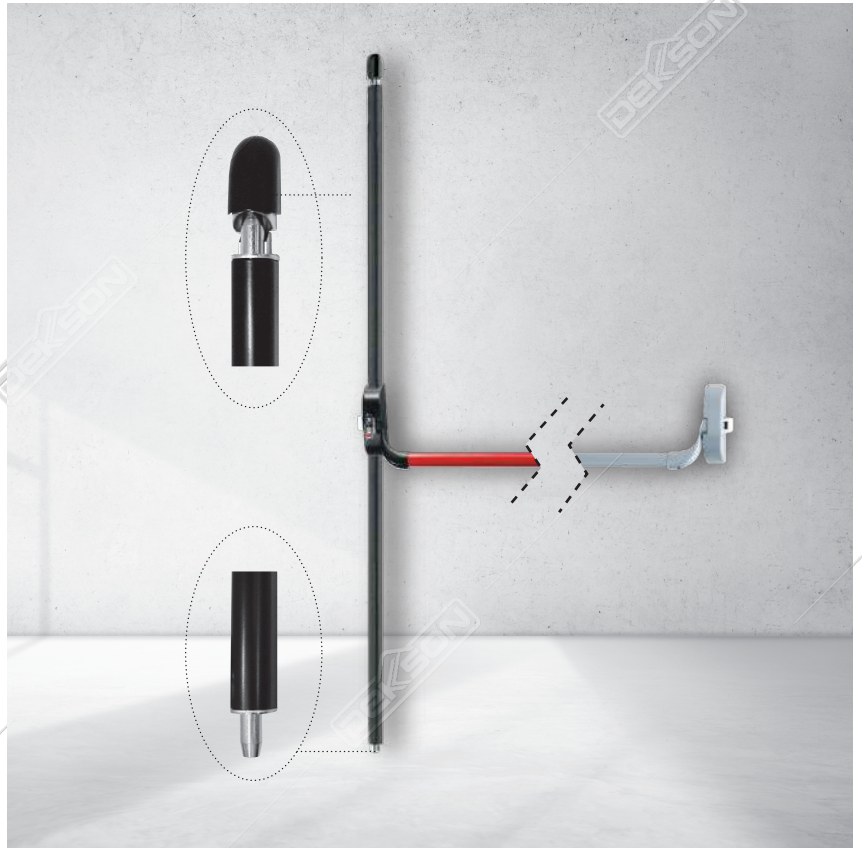

## DOUBLE STEEL DOOR - DOUBLE PANIC




### Inside

- Active Door Panic Exit Device (Rimlock) with Bar or Push Bar Single Point
- Passive Door use Panic Exit Device with 2 Point Bolt or Push Bar 2 Point

### Outside

- Active Door use Handle & Key and Door Closer
- Passive Door use only Door Closer

## DOUBLE STEEL DOOR - SINGLE PANIC

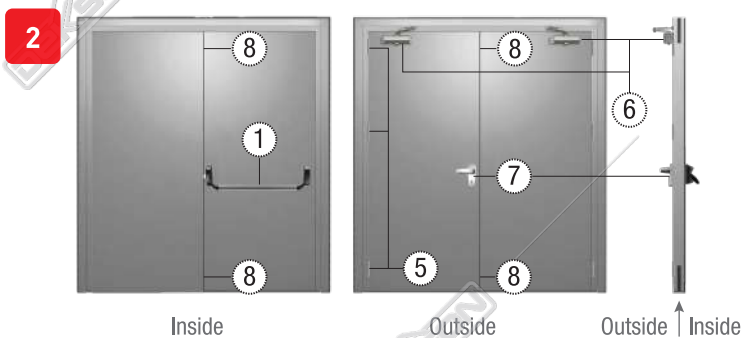

### Inside


- Active Door Panic Exit Device (Rimlock) with Bar or Push Bar Single Point

### Outside

- Active Door use Handle & Key and Door Closer
- Passive Door use only Door Closer

### DOUBLE STEEL DOOR - DOUBLE PANIC

3

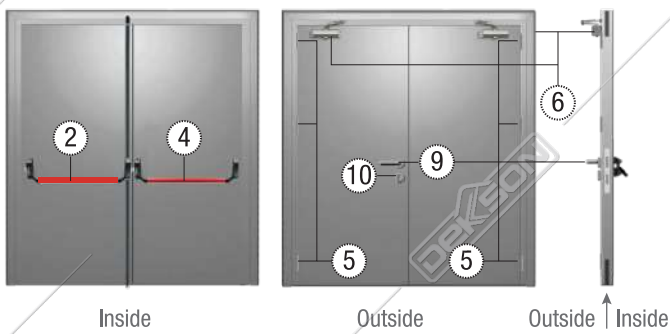

#### Inside


- Active Door use Panic Exit Device (Mortise) with Bar
- Passive Door use Panic Exit Device (Rim Lock) with 2 Point

#### Outside

- Active Door use Regular Handle, Cylinder And Door Closer
- Passive Door use only Door Closer

### DOUBLE STEEL DOOR - SINGLE PANIC

4

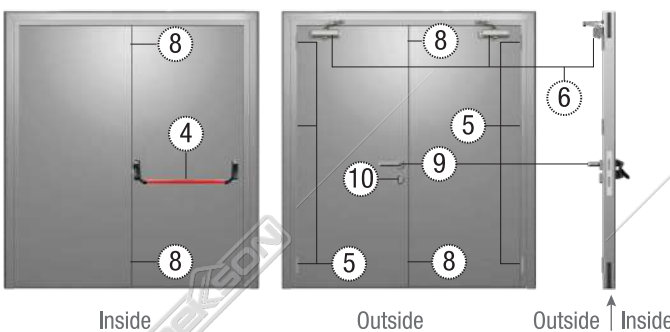

#### Inside


- Active Door use Panic Exit Device (Mortise) with Bar

#### Outside

- Active Door use Regular Handle, Cylinder and Door Closer
- Passive Door use Flush Bolt and Door Closer

### DOUBLE STEEL DOOR - DOUBLE PANIC

5

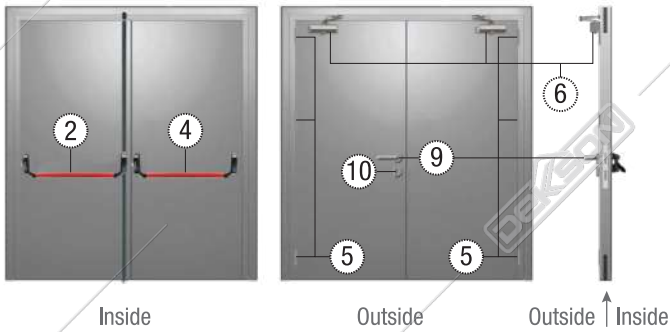

#### Inside


- Active Door use Panic Exit Device (Mortise) with Bar
- Passive Door use Panic Exit Device (Rim Lock) with 2 Point Bolt

#### Outside

- Active Door use Regular Handle, Cylinder and Door Closer
- Passive Door use only Door Closer

### DOUBLE STEEL DOOR - SINGLE PANIC - MORTISE LOCK

6

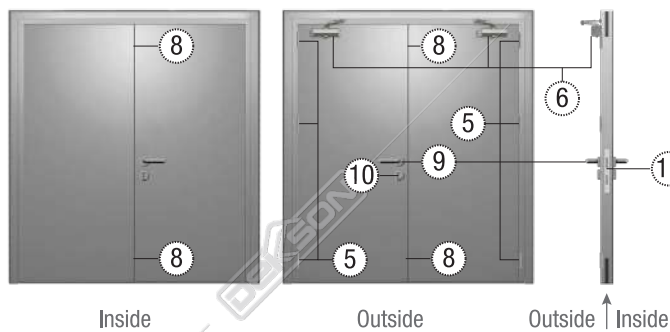

#### Inside

- Active Door use Regular Handle, Cylinder and Mortise Lock Panic Function

#### Outside

- Active Door use Regular Handle and Door Closer
- Passive Door use only Door Closer

# NON PANIC FUNCTION STEEL DOOR


Steel door advantages stretched far beyond emergency event. Steel doors require almost no maintenance, generally last longer than other type of door and allow better energy efficiency

*Refer the number to the index section (page 7-8) for detailed product specification.*



## SINGLE STEEL DOOR NON PANIC

1

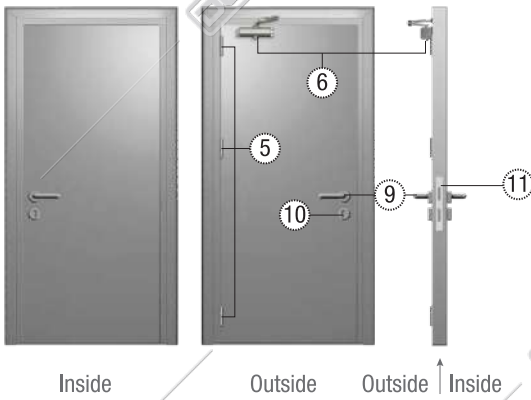

### Inside

- Regular Handle Mortise for Steel Door (non panic) and Cylinder

### Outside

- Regular Handle and Door Closer

\*For further information consult the dedicated pages 73-14

MINI INDEX

### 1 PANIC EXIT DEVICES WITH BAR AND SINGLE POINT

- ISEO Base Panic EXIT 941400504 (Black)+Bar 945928 (Red)
- ISEO Single Point Idea 9411113774A (Metallic Grey)
- ISEO Push Panic 94211758T (Black)
- DEKSON Single Point PD0701 Black/Red

### 2 PANIC EXIT DEVICES WITH BAR AND 2 POINT BOLT

- ISEO 2 Point 9432999594 (Black) + Bar 945928 (Red) + Rod 94399205
- ISEO 2 Point Idea 9432083774 (Metallic Grey)
- ISEO Push 2 Point Bolt 9452117584 + 94300205
- DEKSON 2 Point PD0702 Black/Red

### 4 PALMO PANIC EXIT DEVICE WITH BAR

- ISEO Palmo 94900050379 + MTS
- DEKSON PD8700 + MTS + HDL Black/Red

### 5 HINGE

#### STAINLESS STEEL SUS 304

- DEKSON ESS DL 4x3x3 mm 2BB NRP SSS
- DEKSON ESS DL 4,5x4x3mm 2BB SSS
- DEKSON ESS DL 4x4x3mm 2BB SSS
- DEKSON ESS DL 5x3x3mm 4BB NRP SSS

#### GALVANIZES

- DEKSON ES IR 34x90 - 39x90 GALV
- DEKSON ES IR 64x90 - 39x90 GALV

### 6 DOOR CLOSER

- DEKSON DCL 525 NHO Fire-rated (40-100 kg)
- DEKSON DCL 105 NHO (100 kg)
- DEKSON DCL 1557 NHO NA (150 kg)
- DEKSON DCL 8916 NHO NA (150 kg)





## DOUBLE STEEL DOOR NON PANIC


2



Inside



Outside



Outside | Inside

### Inside

- Active Door use Regular Handle, Mortise for Steel Door (non panic) and Cylinder

### Outside

- Active Door use Regular Handle and Door Closer
- Passive Door use Door Closer and Flush Bolt

#### 7 TRIM FOR PANIC EXIT DEVICE (HANDLE AND KEY)

##### Trim External Control :

- ISEO 94011005T (Black)
- ISEO 94011007T (Metallic Grey)
- DEKKSON PD0701 Black

#### 8 FLUSH BOLT

- DKS FBP 8"
- DKS FBP SQ 501-370mm
- DKS FBP SQ 501-270mm
- DKS FBP SQ 501-370mm
- FB 707 AT SSS R/L

#### 9 HANDLE + KNOB SSS

- ISEO LH5R Curve Ø22mm
- DEKKSON LH5R 016 Ø22mm + KNOB

##### HANDLE STAINLESS STEEL

- ISEO LH5R Curve Ø22mm
- ISEO LHTR Curve Ø22mm
- DEKKSON LH5R 016 Ø22mm
- DEKKSON LHTR 016 Ø22mm

#### 10 CYLINDER

##### A. DOUBLE CYLINDER

- DEKKSON Double Cylinder
- DEKKSON DC 70mm
- DEKKSON DC 80mm
- ISEO Double Cylinder F5
- 820935359 (70mm) SN
- ISEO Double Cylinder R6
- 880935359 (70mm) SN
- 880940409 (80mm) SN
- ISEO Double Cylinder F6
- 810935359 (70mm) SN
- 810935359 (80mm) SN

##### B. HALF CYLINDER

- DEKKSON HC 40mm
- DEKKSON HC 50mm

#### 11 MORTISE LOCK PANIC FUNCTION

- DEKKSON MTS HD IL DL8672 PANIC SSS

##### MORTISE LOCK PANIC FUNCTION

- DEKKSON MTS HD IL DL8672 SSS

\*For further information consult the dedicated pages 13-14

MINI INDEX

# APPLICATION SET



## PANIC BAR STEEL DOOR WITH RIM LOCK

### 1 PANIC EXIT DEVICES WITH BAR AND SINGLE POINT

- ISEO Base Panic EXIT 941400504 (Black)+Bar 945928 (Red)
- ISEO Single Point Idea 9411113774A (Metallic Grey)
- ISEO Push Panic 94211758T (Black)
- DEKKSON Single Point PD0701 Black/Red



### 5 STAINLESS STEEL HINGE SUS 304

- DEKKSON ESS - DL 4,5x4x3 mm 2BB SSS



### 6 DOOR CLOSER

- DEKKSON DCL 105 NHO (100kg)
- DEKKSON DCL 525 NHO (40-100 kg) Fire-rated
- DEKKSON DCL 1557 NHO NA (150 kg)
- DEKKSON DCL 8916 NHO NA (150 kg)




### 7 TRIM FOR PANIC EXIT DEVICE (HANDLE & KEY)

ISEO Trim External Control :

- 94011003T (Grey) • DEKKSON PD0701 Black
- 94011005T (Black)




### DOUBLE ENTRY

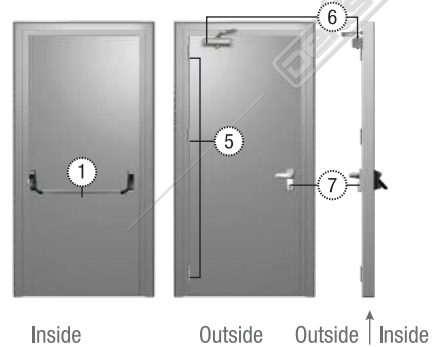

## PANIC BAR STEEL DOOR WITH MORTISE LOCK


### 4 PANIC EXIT DEVICE WITH BAR AND MORTISE

- ISEO Palmo 949000050379 + MTS
- DEKKSON PD8700 + MTS + HDL Black/Red



### 5 STAINLESS STEEL HINGE SUS 304

- DEKKSON ESS - DL 4,5x4x3 mm 2BB SSS
- DEKKSON ESS DL 4x4x3mm 2BB SSS
- DEKKSON ESS DL 4x3x3 mm 2BB NRP SSS
- DEKKSON ESS DL 5x3x3mm 4BB NRP SSS



### 6 DOOR CLOSER

- DEKKSON DCL 105 NHO (100kg)
- DEKKSON DCL 525 NHO (40-100 kg) Fire-rated
- DEKKSON DCL 1557 NHO NA (150 kg)
- DEKKSON DCL 8916 NHO NA (150 kg)



### 9 KNOB

- DEKKSON KNOB ONLY SSS



### 9a ESCUTCHEON

- DEKKSON D01 SSS




### 10 CYLINDER

- DEKKSON HC50mm SN



### SINGLE ENTRY

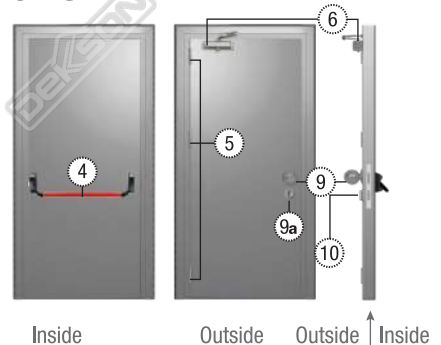



## PANIC STEEL DOOR

**5 STAINLESS STEEL HINGE SUS 304**

- DEKSON ESS - DL 4,5x4x3 mm 2BB SSS



**6 DOOR CLOSER**

- DEKSON DCL 105 NHO (100kg)
- DEKSON DCL 525 NHO (40-100 kg) Fire-rated
- DEKSON DCL 1557 NHO NA (150 kg)
- DEKSON DCL 8916 NHO NA (150 kg)



**9 HANDLE + KNOB SSS**

- ISEO LHSR Curve Ø22mm + KNOB SSS
- DKS LHSR 016 Ø22mm + KNOB SSS



**10 CYLINDER**

- DEKSON HC50mm SN




**11 MORTISE LOCK PANIC FUNCTION**

- DEKSON MTS HD DL 8672 PANIC SSS



### SINGLE ENTRY

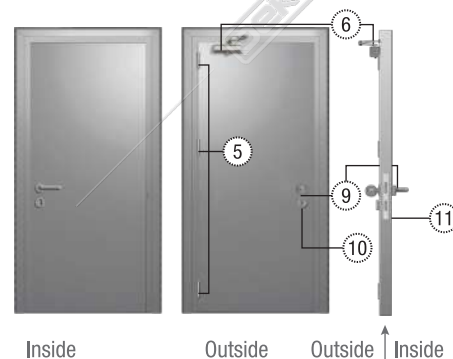

## PANIC STEEL DOOR

**5 STAINLESS STEEL HINGE SUS 304**

- DEKSON ESS - DL 4,5x4x3 mm 2BB SSS



**6 DOOR CLOSER**

- DEKSON DCL 105 NHO (100kg)
- DEKSON DCL 525 NHO (40-100 kg) Fire-rated
- DEKSON DCL 1557 NHO NA (150 kg)
- DEKSON DCL 8916 NHO NA (150 kg)



**9 HANDLE + KNOB SSS**

- ISEO LHSR Curve Ø22mm + KNOB SSS
- DKS LHSR 016 Ø22mm



**10 CYLINDER**

- ISEO Double Cylinder F6 - 810935359 (70mm) SN




**11 MORTISE LOCK PANIC FUNCTION**

- DEKSON MTS IL DL 8672 PANIC SSS



### DOUBLE ENTRY

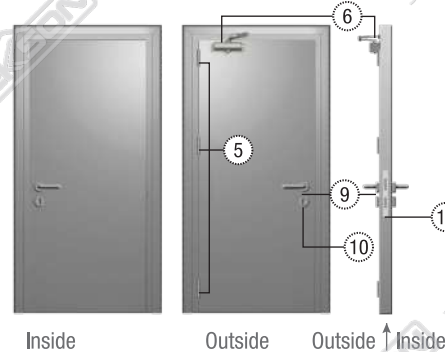


# SHAFT DOOR

Shaft Door is a small door panel that opens to electrical panel, storage cleaning tools, etc. Most shaft door open and close in a single direction



1

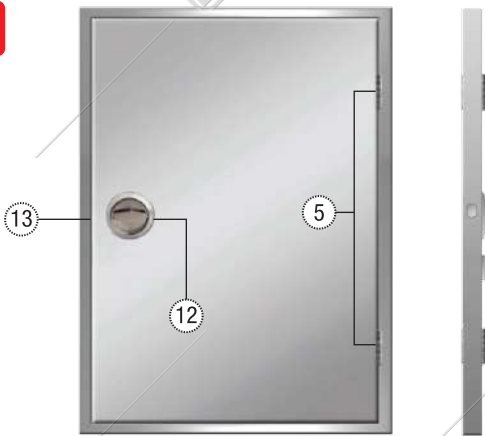

**5** STAINLESS STEEL HINGE SUS 304  
• DEKSON ESS - DL 4x3x2 mm 2BB SSS



**12** PULL PLATE  
• HDL DEKSON PP 009 SSS



**13** LATCH BOLT  
• DKS LFS 001P 60mm SSS





2



**5 STAINLESS STEEL HINGE SUS 304**  
• DEKKSON ESS - DL 4x3x2 mm 2BB SSS



**12 PULL PLATE**  
• HDL DEKKSON PP 009 SSS



**14 WINDOW BOLT**  
• WB 001 50mm SSS



**15 WINDOW BOLT SS with KEY**



**16 MORTISE DEADBOLT**  
• DEKKSON MTS DB 40MM SSS



**9a ESCUTCHEON**  
• DEKKSON D01 SSS




**10b HALF CYLINDER**  
• DEKKSON HC 40 MM SN



## 1 PANIC EXIT DEVICES WITH BAR AND SINGLE POINT

10 YEARS MECHANICAL WARRANTY



- ISEO Base Panic EXIT 941400504 (Black)+Bar 945928 (Red)
- ISEO Single Point Idea 9411113774A (Metallic Grey)
- ISEO Push Panic 94211758T (Black)



- Single Point Rim Type PD0701 (Black/Red)

## 2 PANIC EXIT DEVICES WITH BAR AND 2 POINT BOLT

10 YEARS MECHANICAL WARRANTY




- ISEO 2 Point 9432999594 (Black) + Bar 945928 (Red) + Rod 94399205
- ISEO 2 Point Idea 9432083774 (Metallic Grey)
- ISEO Push 2 Point Bolt 9452117584 + 94300205



- DEKKSON 2 Point Latch Rim PD0702 (Black/Red)

## 3 ISEO EXIT DEVICE WITH BAR PALMO AND 2 POINT BOLT

10 YEARS MECHANICAL WARRANTY

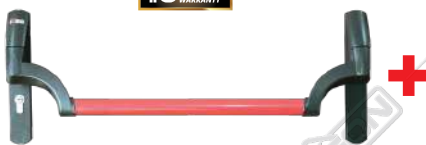


- ISEO Palmo 2 Point Bolt 949000050379 + Counter L + Relatch + ROD

## 4 PANIC EXIT DEVICE WITH BAR MORTISE

10 YEARS MECHANICAL WARRANTY



- ISEO Palmo 949000050379 + MTS

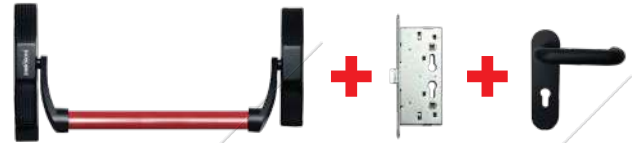

- DEKKSON PD8700 + MTS + HDL Black/Red

## 5 HINGE

### STAINLESS STEEL HINGE SUS 304



- DEKKSON ESS DL 3x2, 5x2mm 2BB SSS



- DEKKSON ESS DL 4x3x3 mm 2BB NRP SSS



- DEKKSON ESS DL 4,5x4x3mm 2BB SSS



- DEKKSON ESS DL 4x3x2mm 2BB SSS



- DEKKSON ESS DL 4x4x3mm 2BB SSS



- DEKKSON ESS DL 5x3x3mm 4BB NRP SSS

### GALVANIZED HINGE



- DEKKSON ES IR 34X90 - 39X90 GALV



- DEKKSON ES IR 64X90 - 39X90 GALV

## 6 DOOR CLOSER

3 YEAR MECHANICAL WARRANTY



- DEKKSON DCL 525 NHO Fire-rated (40-100 kg)



- DEKKSON DCL 105 NHO (100 kg)



- DEKKSON DCL 1557 NHO NA (150 kg)



- DEKKSON DCL 8916 NHO NA (150 kg)

## 7 TRIM FOR IDEA PANIC EXIT DEVICE (HANDLE AND KEY)



### ISEO Trim External Control :

- 94011005T (Black)
- 94011007T (Metallic Grey)



### DEKKSON Trim External Control :

- PD0701 (Black)

# INDEX

**8 FLUSH BOLT**

- DKS FBP 8"
- DKS FBP SQ 501-270mm
- DKS FBP SQ 501-370mm

- FB 707 AT SSS R/L

**12 PULL PLATE**

- HDL DEKSON PP 009 SSS

**9 HANDLE + KNOB SSS**

- ISEO LHSR Curve Ø22mm
- DEKKSON LHSR 016 Ø22mm + KNOB

### HANDLE STAINLESS STEEL

- ISEO LHSR Curve Ø22mm
- DEKKSON LHSR 016 Ø22mm
- ISEO LHTR Curve Ø22mm
- DEKKSON LHTR 016 Ø22mm

- ISEO KNOB ONLY
- DEKKSON KNOB ONLY

**9a**

- ESCUTHEON D01 SSS

**10 CYLINDER**

#### A. DOUBLE CYLINDER

- DEKKSON Double Cylinder
  - DEKKSON DC 70mm
  - DEKKSON DC 80mm
- ISEO Double Cylinder F5
  - 820935359 (70mm) SN

- ISEO Double Cylinder F6
  - 810935359 (70mm) SN
  - 810935359 (80mm) SN
- ISEO Double Cylinder R6
  - 880935359 (70mm) SN
  - 880940409 (80mm) SN

#### B. HALF CYLINDER

- DEKKSON HC 40mm
- DEKKSON HC 50mm

**11 MORTISE LOCK PANIC FUNCTION MORTISE LOCK NON PANIC FUNCTION**

- DEKKSON MTS HD IL DL8672 PANIC SSS
- DEKKSON MTS HD IL DL8672 SSS

LIFETIME Warranty  
Mechanical Only

**13 LATCH BOLT**

- DEKKSON CLW 510Z SN

- DEKKSON LFS 001P 60mm SSS

**14 WINDOW BOLT**

- WB 001 50mm SSS

**15 WINDOW BOLT SS with KEY**

**16 MORTISE DEADBOLT**

- DEKKSON MTS DB 40mm SSS

**17 DOOR STOP**

- DS 006 SSS

**18 DOOR SELECTOR**

- DEKKSON DSR 300 SSS



[www.dekson.com](http://www.dekson.com)

SCAN HERE



AVAILABLE AT:

