



ACCESSORIES FOR

STEEL DOOR

- Steel Door Panic
- Shaft Door
- Panic Exit Door



THE MODERN ACCESSORIES
FOR STEEL DOOR

Steel Door is the door of choice whenever the ultimate strength, durability, and safety are expected. A good steel door, however, won't function optimally if it isn't supported by dependable steel door accessories.

DEKSON and ISEO, combines their expertise in manufacturing high quality architectural hardware to ensure that your steel doors work perfectly, especially in emergency condition where quality directly translates to saving lives.


Table of Contents :

Single Leaf Steel Door Panic Function	03
Double Leaf Steel Door	05
Non Panic Function Steel Door	07
Application Set	09
Shaft Door	11
Index	12
Certificates	14

DEKSON reserves the rights to change the design & technical specifications of the products or to make additions or improvements without any notification. If you must form a complete sets for engineering. Please contact the local distributor or our company to inquire about the accurate sizes, or measure according to the sizes of the object itself.

SINGLE LEAF STEEL DOOR PANIC FUNCTION

Our Panic Door accessories adhere to the latest panic exit devices standardization and certification. ISEO accessories in particular complies to the *stricter safety standard of European Union*. Refer the number to the index section (page 4) for detailed product specification.

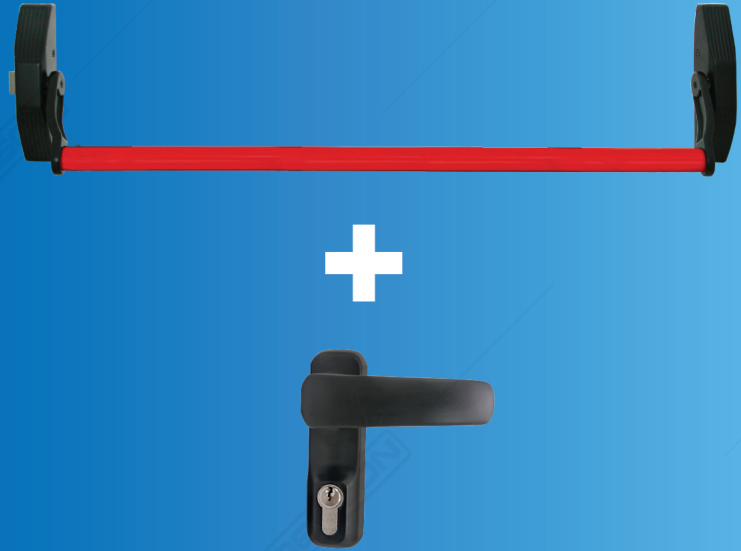

SINGLE STEEL DOOR (PANIC FUNCTION) WITH BAR



Inside

- use Panic Exit Device with Bar (Rimlock)

Outside

- use Handle & Key and Door Closer

SINGLE STEEL DOOR (PANIC FUNCTION) WITH BAR AND 2 POINT BOLT




Inside

- use Panic Exit Device with 2 Point Bolt or Push Bar 2 Point

Outside

- use Handle & Key and Door Closer

SINGLE STEEL DOOR (PANIC FUNCTION) WITH BAR AND MORTISE

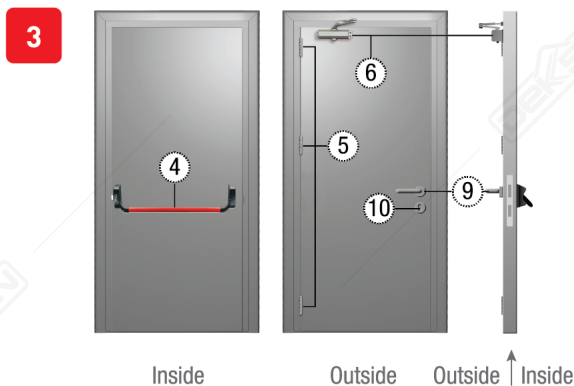

Inside

- use Panic Exit Device with Mortise

Outside

- use Regular Handle and Door Closer

SINGLE STEEL DOOR (PANIC FUNCTION) WITH MORTISE LOCK



Inside and Outside

- use Regular Handle with Panic Mortise Lock and Door Closer

*For further information consult the dedicated pages 12-13

1 PANIC EXIT DEVICES WITH BAR AND SINGLE POINT

- ISEO Base Panic EXIT 941400504 (Black)+Bar 945928 (Red)
- ISEO Single Point Idea 9411113774A (Metallic Grey)
- ISEO Push Panic 94211758T (Black)
- DEKKSON Single Point PD0701 Black/Red

2 PANIC EXIT DEVICES WITH BAR AND 2 POINT BOLT

- ISEO 2 Point 9432999594 (Black) + Bar 945928 (Red) + Rod 94399205
- ISEO 2 Point Idea 9432083774 (Metallic Grey)
- ISEO Push 2 Point Bolt 9452117584 + 94300205
- DEKKSON 2 Point PD0702 Black/Red

4 PANIC EXIT DEVICE WITH BAR AND MORTISE

- ISEO Palmo 949000050379 + MTS
- DEKKSON PD8700 + MTS + HDL Black/Red

5 HINGE

STAINLESS STEEL SUS 304

- DEKKSON ESS DL 4x3x3 mm 2BB NRP SSS
- DEKKSON ESS DL 4x4x3mm 2BB SSS
- DEKKSON ESS DL 4,5x4x3mm 2BB SSS
- DEKKSON ESS DL 5x3x3mm 4BB NRP SSS

GALVANIZES

- DEKKSON ES IR 34x90 - 39x90 GALV
- DEKKSON ES IR 64x90 - 39x90 GALV

6 DOOR CLOSER

- DEKKSON DCL 525 NHO Fire-rated (40-100 kg)
- DEKKSON DCL 1557 NHO NA (150 kg)
- DEKKSON DCL 105 NHO (100 kg)
- DEKKSON DCL 8916 NHO NA (150 kg)

7 TRIM FOR PANIC EXIT DEVICE (HANDLE AND KEY)

Trim External Control :

- ISEO 94011005T (Black)
- ISEO 94011007T (Metallic Grey)
- DEKKSON PD0701 Black

9 HANDLE + KNOB SSS

- ISEO LHSR Curve Ø22mm
- DEKKSON LHTR 016 Ø22mm + KNOB

HANDLE STAINLESS STEEL

- ISEO LHTR Curve Ø22mm
- ISEO LHTR Curve Ø22mm
- DEKKSON LHTR 016 Ø22mm
- DEKKSON LHTR 016 Ø22mm

10 CYLINDER

A. DOUBLE CYLINDER

- DEKKSON Double Cylinder
- DEKKSON DC 70mm
- DEKKSON DC 80mm
- ISEO Double Cylinder R6
- 880935359 (70mm) SN
- 880940409 (80mm) SN
- ISEO Double Cylinder F5
- 820935359 (70mm) SN
- ISEO Double Cylinder F6
- 810935359 (70mm) SN
- 810935359 (80mm) SN

B. HALF CYLINDER

- DEKKSON HC 40mm
- DEKKSON HC 50mm

11 MORTISE LOCK PANIC FUNCTION

- DEKKSON MTS HD IL DL8672 PANIC SSS


MORTISE LOCK NON PANIC FUNCTION

- DEKKSON MTS HD IL DL8672 SSS

DOUBLE LEAF STEEL DOOR PANIC FUNCTION

If the double steel door is located on strategic area where a lot of people are anticipated to pass through it in emergency event, it is recommended to install panic exit device on booth door leaf. If not, installing panic exit device only on the active door is acceptable.

Refer the number to the index section (page 7-8) for detailed product specification.

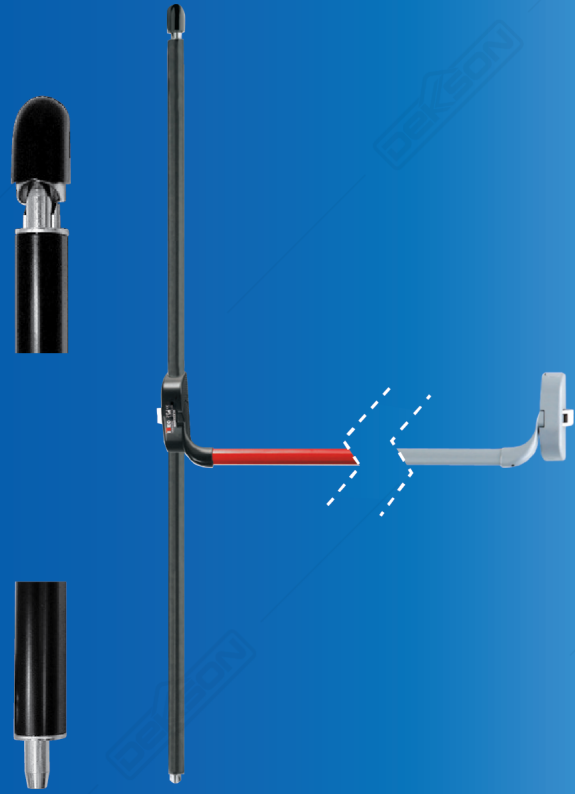

DOUBLE STEEL DOOR - DOUBLE PANIC WITH RIM LOCK




Inside

- Active Door Panic Exit Device (Rimlock) with Bar or Push Bar Single Point
- Passive Door use Panic Exit Device with 2 Point Bolt or Push Bar 2 Point

Outside

- Active Door use Handle & Key and Door Closer
- Passive Door use only Door Closer

DOUBLE STEEL DOOR - SINGLE PANIC WITH RIM LOCK

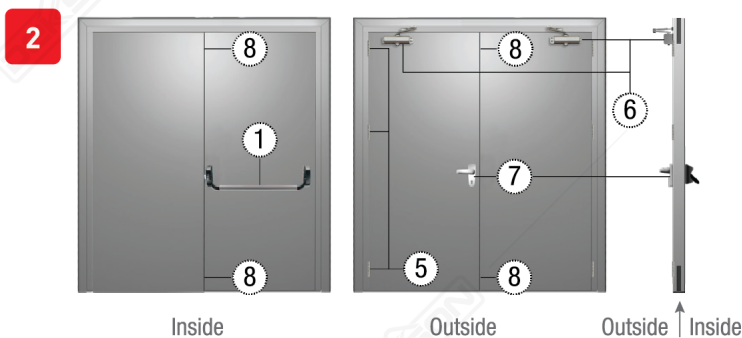

Inside


- Active Door Panic Exit Device (Rimlock) with Bar or Push Bar Single Point

Outside

- Active Door use Handle & Key and Door Closer
- Passive Door use only Door Closer

DOUBLE STEEL DOOR - DOUBLE PANIC WITH MORTISE LOCK

3

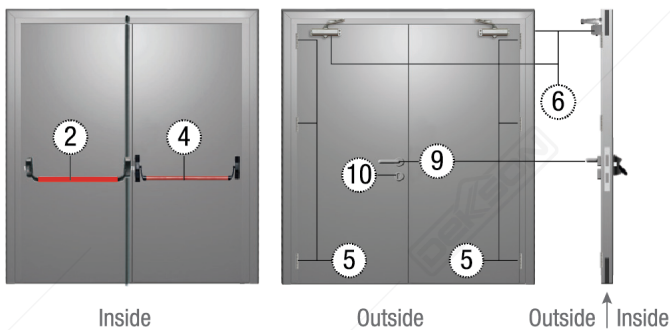

Inside


- Active Door use Panic Exit Device (Mortise) with Bar
- Passive Door use Panic Exit Device (Rim Lock) with 2 Point

Outside

- Active Door use Regular Handle, Cylinder And Door Closer
- Passive Door use only Door Closer

DOUBLE STEEL DOOR - SINGLE PANIC WITH MORTISE LOCK

4

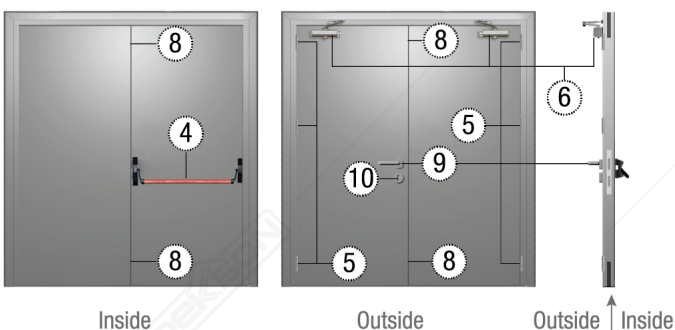

Inside


- Active Door use Panic Exit Device (Mortise) with Bar

Outside

- Active Door use Regular Handle, Cylinder and Door Closer
- Passive Door use Flush Bolt and Door Closer

DOUBLE STEEL DOOR - DOUBLE PANIC WITH MORTISE LOCK

5

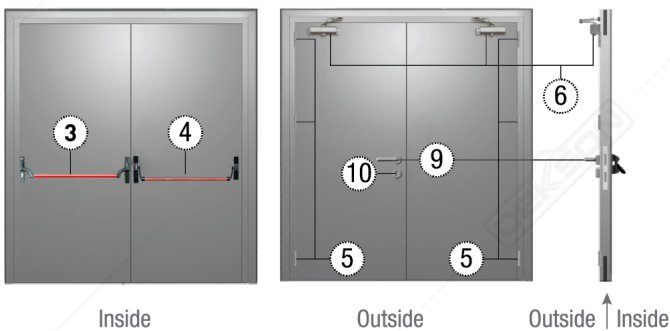

Inside


- Active Door use Panic Exit Device (Mortise) with Bar
- Passive Door use Panic Exit Device (Mortise type) with 2 Point Bolt

Outside

- Active Door use Regular Handle, Cylinder and Door Closer
- Passive Door use only Door Closer

DOUBLE STEEL DOOR - SINGLE PANIC WITH MORTISE LOCK

6

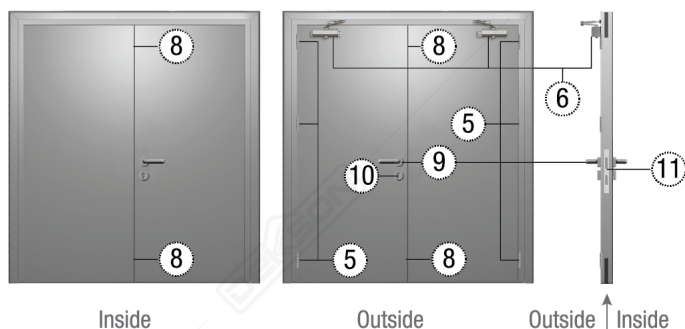

Inside

- Active Door use Regular Handle, Cylinder and Mortise Lock Panic Function

Outside

- Active Door use Regular Handle and Door Closer
- Passive Door use only Door Closer


NON PANIC FUNCTION STEEL DOOR

Steel door advantages stretched far beyond emergency event. Steel doors require almost no maintenance, generally last longer than other type of door and allow better energy efficiency

Refer the number to the index section (page 7-8) for detailed product specification.



SINGLE STEEL DOOR NON PANIC

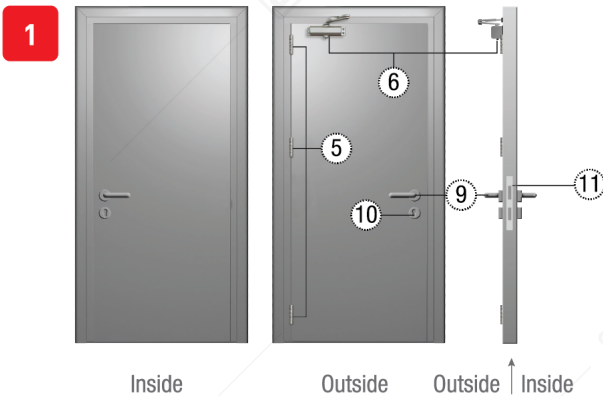

Inside

- Regular Handle Mortise for Steel Door (non panic) and Cylinder

Outside

- Regular Handle and Door Closer

*For further information consult the dedicated pages 12-13

MINI INDEX

- 5 HINGE**
STAINLESS STEEL SUS 304
- DEKKSON ESS DL 4x3x3 mm 2BB NRP SSS
 - DEKKSON ESS DL 4,5x4x3mm 2BB SSS
 - DEKKSON ESS DL 4x4x3mm 2BB SSS
 - DEKKSON ESS DL 5x3x3mm 4BB NRP SSS

- GALVANIZES**
- DEKKSON ES IR 34x90 - 39x90 GALV
 - DEKKSON ES IR 64x90 - 39x90 GALV

- 6 DOOR CLOSER**
- DEKKSON DCL 525 NHO Fire-rated (40-100 kg)
 - DEKKSON DCL 105 NHO (100 kg)
 - DEKKSON DCL 1557 NHO NA (150 kg)
 - DEKKSON DCL 8916 NHO NA (150 kg)

- 8 FLUSH BOLT**
- DKS FBP 8"
 - DKS FBP SQ 501-270mm
 - DKS FBP SQ 501-370mm
 - FB 707 AT SSS R/L

- 9 HANDLE + KNOB SSS**
- ISEO LHSR Curve Ø22mm
 - DEKKSON LHSR 016 Ø22mm + KNOB

- HANDLE STAINLESS STEEL**
- ISEO LHSR Curve Ø22mm
 - DEKKSON LHSR 016 Ø22mm
 - ISEO LHTR Curve Ø22mm
 - DEKKSON LHTR 016 Ø22mm



DOUBLE STEEL DOOR NON PANIC

2



Inside



Outside



Outside | Inside

Inside

- Active Door use Regular Handle, Mortise for Steel Door (non panic) and Cylinder

Outside

- Active Door use Regular Handle and Door Closer
- Passive Door use Door Closer and Flush Bolt

10 CYLINDER

A. DOUBLE CYLINDER

- DEKKSON Double Cylinder
- DEKKSON DC 70mm
- DEKKSON DC 80mm
- ISEO Double Cylinder F5
- 820935359 (70mm) SN
- ISEO Double Cylinder R6
- 880935359 (70mm) SN
- 880940409 (80mm) SN
- ISEO Double Cylinder F6
- 810935359 (70mm) SN
- 810935359 (80mm) SN

B. HALF CYLINDER

- DEKKSON HC 40mm
- DEKKSON HC 50mm

11 MORTISE LOCK PANIC FUNCTION

- DEKKSON MTS HD IL DL8672 PANIC SSS


MORTISE LOCK PANIC FUNCTION

- DEKKSON MTS HD IL DL8672 SSS

*For further information consult the dedicated pages 12-13

MINI INDEX

APPLICATION SET

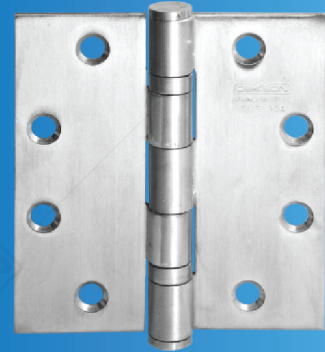

Panic doors are used in emergency situations, where occupants of the building are expected to escape using these doors. Panic doors must meet fire resistance requirements, as well as the hardware installed on the door. In addition to being fire-resistant, locking mechanisms must also be strong and easily and quickly opened from the inside under any conditions. Therefore, this handle is recommended because it is made of stainless steel material, making it strong and sturdy in its usage.

Refer the number to the index section (page 9-10) for detailed product specification.

PANIC BAR STEEL DOOR WITH RIM LOCK

1 PANIC EXIT DEVICES WITH BAR AND SINGLE POINT

- ISEO Base Panic EXIT 941400504 (Black)+Bar 945928 (Red)
- ISEO Single Point Idea 9411113774A (Metallic Grey)
- ISEO Push Panic 94211758T (Black)
- DEKKSON Single Point PD0701 Black/Red




5 STAINLESS STEEL HINGE SUS 304

- DEKKSON ESS - DL 4,5x4x3 mm 2BB SSS



6 DOOR CLOSER

- DEKKSON DCL 105 NHO (100kg)
- DEKKSON DCL 525 NHO (40-100 kg) Fire-rated
- DEKKSON DCL 1557 NHO NA (150 kg)
- DEKKSON DCL 8916 NHO NA (150 kg)




7 TRIM FOR PANIC EXIT DEVICE (HANDLE & KEY)

ISEO Trim External Control :

- 94011003T (Grey) • DEKKSON PD0701 Black
- 94011005T (Black)




DOUBLE ENTRY

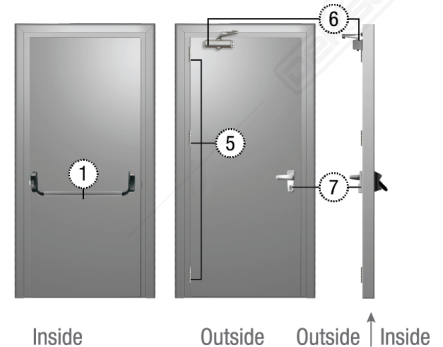

PANIC BAR STEEL DOOR WITH MORTISE LOCK


4 PANIC EXIT DEVICE WITH BAR AND MORTISE

- ISEO Palmo 949000050379 + MTS
- DEKKSON PD8700 + MTS + HDL Black/Red



5 STAINLESS STEEL HINGE SUS 304

- DEKKSON ESS - DL 4,5x4x3 mm 2BB SSS DEKKSON ESS DL 4x4x3mm 2BB SSS
- DEKKSON ESS DL 4x3x3 mm 2BB NRP SSS DEKKSON ESS DL 5x3x3mm 4BB NRP SSS



6 DOOR CLOSER

- DEKKSON DCL 105 NHO (100kg)
- DEKKSON DCL 525 NHO (40-100 kg) Fire-rated
- DEKKSON DCL 1557 NHO NA (150 kg)
- DEKKSON DCL 8916 NHO NA (150 kg)



9 KNOB

- DEKKSON KNOB ONLY SSS



9a ESCUTCHEON

- DEKKSON D01 SSS





10 CYLINDER

- DEKKSON HC50mm SN



SINGLE ENTRY

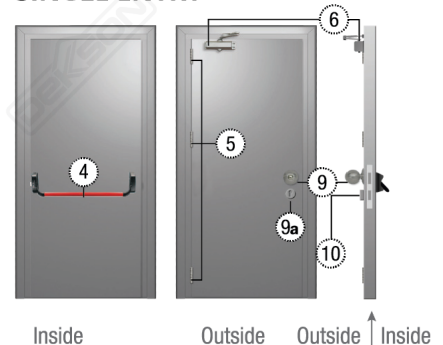

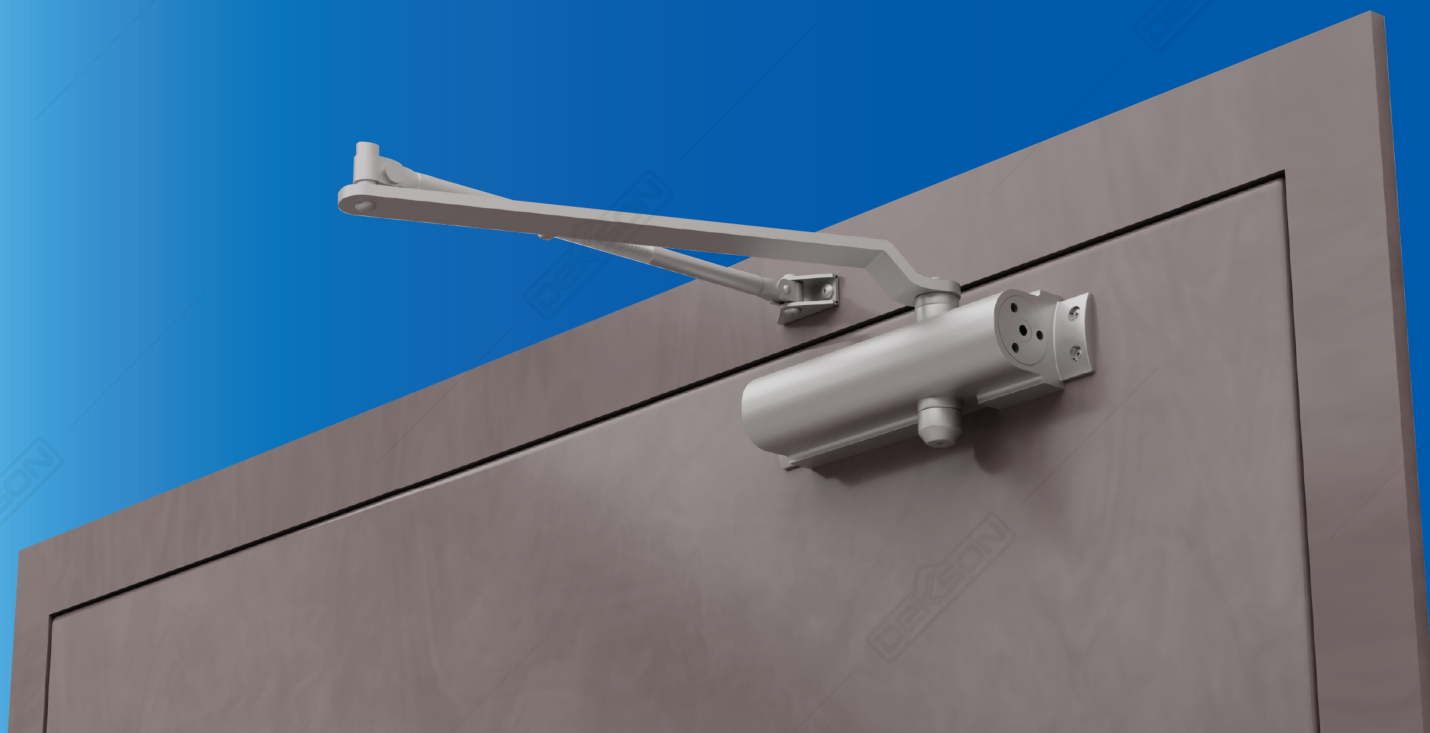

PANIC STEEL DOOR

- 5 STAINLESS STEEL HINGE SUS 304**
- DEKKSON ESS - DL 4,5x4x3 mm 2BB SSS



- 6 DOOR CLOSER**
- DEKKSON DCL 105 NHO (100kg)
 - DEKKSON DCL 525 NHO (40-100 kg) Fire-rated
 - DEKKSON DCL 1557 NHO NA (150 kg)
 - DEKKSON DCL 8916 NHO NA (150 kg)



- 9 HANDLE + KNOB SSS (SINGLE ENTRY)**
- ISEO LHSR Curve Ø22mm + KNOB SSS
 - DKS LHSR 016 Ø22mm + KNOB SSS



HANDLE (DOUBLE ENTRY)

- ISEO LHSR Curve Ø22mm
- DKS LHSR 016 Ø22mm



- 10 CYLINDER (SINGLE ENTRY)**
- DEKKSON HC50mm SN



CYLINDER (DOUBLE ENTRY)


- ISEO Double Cylinder F6 - 810935359 (70mm) SN




- 11 MORTISE LOCK PANIC FUNCTION**
- DEKKSON MTS HD DL 8672 PANIC SSS



SINGLE ENTRY

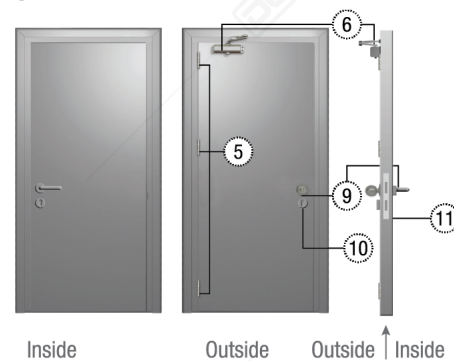

DOUBLE ENTRY

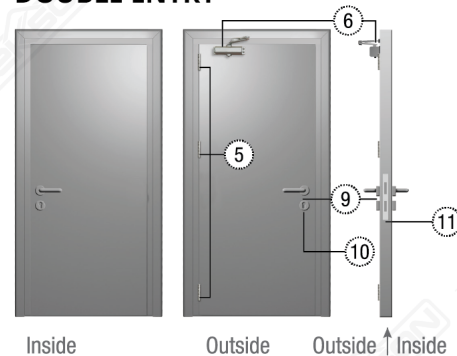

SHAFT DOOR

Shaft Door is a small door panel that opens to electrical panel, storage cleaning tools, etc. Most shaft door open and close in a single direction



5 **STAINLESS STEEL HINGE SUS 304**
• DEKSON ESS - DL 4x3x2 mm 2BB SSS



12 **PULL PLATE**
• HDL DEKSON PP 009 SSS



13 **LATCH BOLT**
• DKS LFS 001P 60mm SSS



5 **STAINLESS STEEL HINGE SUS 304**
• DEKSON ESS - DL 4x3x2 mm 2BB SSS



12 **PULL PLATE**
• HDL DEKSON PP 009 SSS



14 **WINDOW BOLT**
• WB 001 50mm SSS



15 **WINDOW BOLT SS with KEY**



16 **MORTISE DEADBOLT**
• DEKSON MTS DB 40MM SSS



9a **ESCUTCHEON**
• DEKSON D01 SSS




10b **HALF CYLINDER**
• DEKSON HC 40 MM SN



1 PANIC EXIT DEVICES WITH BAR AND SINGLE POINT

10 YEARS MECHANICAL WARRANTY



- ISEO Base Panic EXIT 941400504 (Black)+Bar 945928 (Red)
- ISEO Single Point Idea 9411113774A (Metallic Grey)
- ISEO Push Panic 94211758T (Black)



- Single Point Rim Type PD0701 (Black/Red)

2 PANIC EXIT DEVICES WITH BAR AND 2 POINT BOLT


10 YEARS MECHANICAL WARRANTY



- ISEO 2 Point 9432999594 (Black) + Bar 945928 (Red) + Rod 94399205
- ISEO 2 Point Idea 9432083774 (Metallic Grey)
- ISEO Push 2 Point Bolt 9452117584 + 94300205




- DEKKSON 2 Point Latch Rim PD0702 (Black/Red)

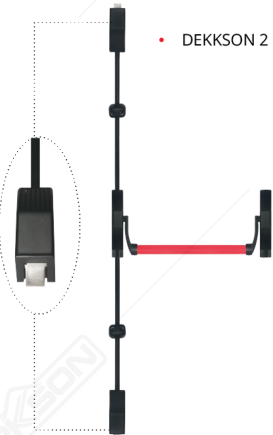

3 ISEO EXIT DEVICE WITH BAR PALMO AND 2 POINT BOLT

10 YEARS MECHANICAL WARRANTY

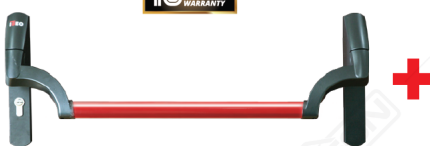

- ISEO Palmo 2 Point Bolt 949000050379 + Counter L + Relatch + ROD



4 PANIC EXIT DEVICE WITH BAR MORTISE

10 YEARS MECHANICAL WARRANTY



- ISEO Palmo 949000050379 + MTS



- DEKKSON PD8700 + MTS + HDL Black/Red

5 HINGE

STAINLESS STEEL HINGE SUS 304



- DEKKSON ESS DL 3x2,5x2mm 2BB SSS



- DEKKSON ESS DL 4x3x3 mm 2BB NRP SSS



- DEKKSON ESS DL 4,5x4x3mm 2BB SSS



- DEKKSON ESS DL 4x3x2mm 2BB SSS



- DEKKSON ESS DL 4x4x3mm 2BB SSS



- DEKKSON ESS DL 5x3x3mm 4BB NRP SSS

GALVANIZED HINGE



- DEKKSON ES IR 34X90 - 39X90 GALV



- DEKKSON ES IR 64X90 - 39X90 GALV

6 DOOR CLOSER

3 YEAR MECHANICAL WARRANTY



- DEKKSON DCL 525 NHO Fire-rated (40-100 kg)



- DEKKSON DCL 105 NHO (100 kg)



- DEKKSON DCL 1557 NHO NA (150 kg)



- DEKKSON DCL 8916 NHO NA (150 kg)

7 TRIM FOR IDEA PANIC EXIT DEVICE (HANDLE AND KEY)



ISEO Trim External Control :

- 94011005T (Black)
- 94011007T (Metallic Grey)



DEKKSON Trim External Control :

- PD0701 (Black)

8 FLUSH BOLT



- DKS FBP 8"
- DKS FBP SQ 501-270mm
- DKS FBP SQ 501-370mm



- FB 707 AT SSS R/L

9 HANDLE + KNOB SSS



- ISEO LHSR Curve Ø22mm
- DEKKSON LHSR 016 Ø22mm + KNOB

HANDLE STAINLESS STEEL



- ISEO LHSR Curve Ø22mm
- DEKKSON LHSR 016 Ø22mm
- ISEO LHTR Curve Ø22mm
- DEKKSON LHTR 016 Ø22mm



- ISEO KNOB ONLY
- DEKKSON KNOB ONLY

9a



- ESCUTHEON D01 SSS

10 CYLINDER

LIFETIME
Warranty
Mechanical Only

A. DOUBLE CYLINDER



- DEKKSON Double Cylinder
- DEKKSON DC 70mm
- DEKKSON DC 80mm



- ISEO Double Cylinder F5
- 820935359 (70mm) SN



- ISEO Double Cylinder F6
- 810935359 (70mm) SN
- 810935359 (80mm) SN



- ISEO Double Cylinder R6
- 880935359 (70mm) SN
- 880940409 (80mm) SN

B. HALF CYLINDER



- DEKKSON HC 40mm
- DEKKSON HC 50mm

11 MORTISE LOCK PANIC FUNCTION



- DEKKSON MTS HD IL DL8672 PANIC SSS

MORTISE LOCK NON PANIC FUNCTION



- DEKKSON MTS HD IL DL8672 SSS

LIFETIME
Warranty
Mechanical Only

12 PULL PLATE



- HDL DEKKSON PP 009 SSS

13 LATCH BOLT



- DEKKSON CLW 510Z SN



- DEKKSON LFS 001P 60mm SSS

14 WINDOW BOLT



- WB 001 50mm SSS

15 WINDOW BOLT SS with KEY



16 MORTISE DEADBOLT



LIFETIME
Warranty
Mechanical Only

- DEKKSON MTS DB 40mm SSS

17 DOOR STOP



- DS 006 SSS

18 DOOR SELECTOR



- DEKKSON DSR 300 SSS



AVAILABLE AT :



SCAN HERE



DKS/STEEL/2024