
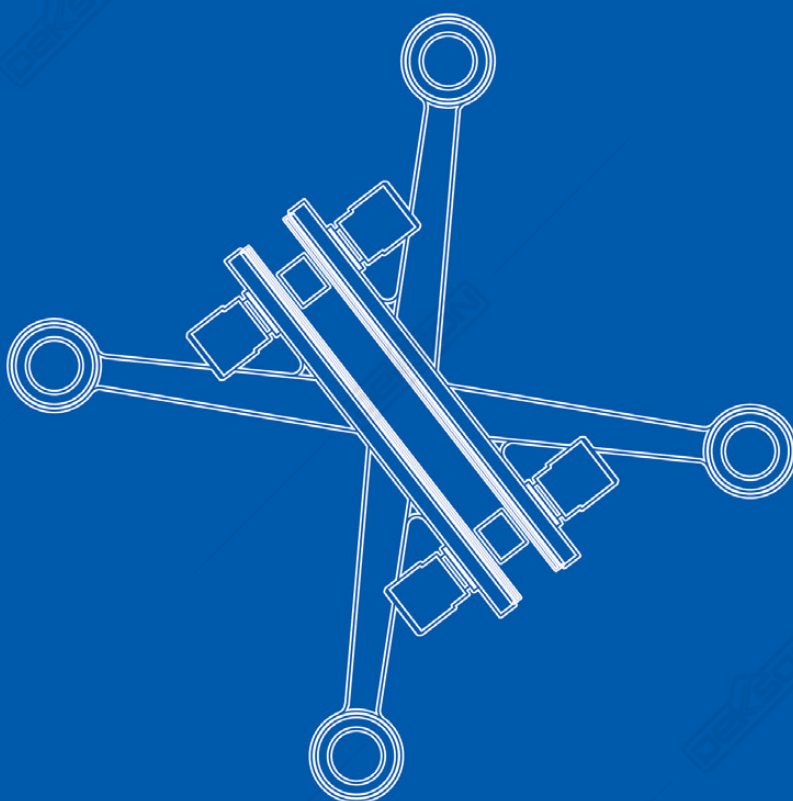
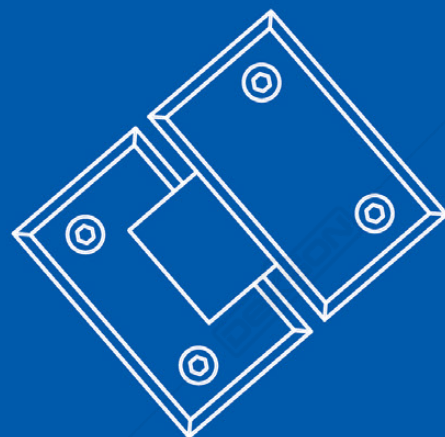


BROCHURE

Accessories for
GLASS

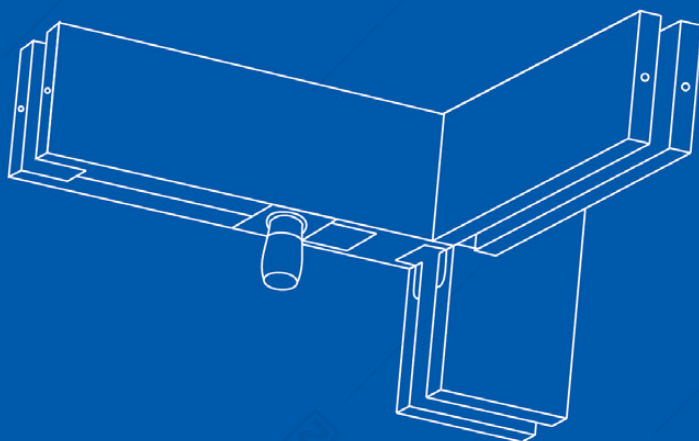

A modern office interior featuring glass partitions and doors. The space is bright and airy, with large windows on the left side. In the foreground, there is a light-colored wooden floor. In the background, there is a beige sectional sofa, a potted plant, and a round table with four chairs. The glass partitions are made of clear glass and are held in place by metal brackets and rollers. The ceiling is white with recessed lighting. The overall design is clean and professional.

THE NEW MODERN LIFESTYLE OF GLASS **ACCESSORIES**

Dekkson glass door accessories provide high quality mechanism and years of warranty, ensuring an ongoing smooth operation. From the most private areas at your shower room to public areas, glass door inspires professionalism, transparency and prestige. Dekkson accessories is the perfect choice to support any kind of glass doors.

Table of Contents :

GLASS DOOR

03

Hydraulic Patch Fitting	3
Patch Fitting	4
Floor Spring	6
Spider Fitting	9
Automatic Sliding Door	15
Sliding Glass Telescopic	17
Sliding Magtec	19
Hydraulic Soft Closer	20
Sliding Glass Door	21
Slide & Fold Glass Door	23
Pull Handle	24
Door Knob	27
Sliding Glass Lock & Glass Door Lock	28

SHOWER DOOR

33

Shower Hinge	33
Sliding Shower	41

OTHER GLASS ACCESSORIES

45

Cubical System for Toilet / Shower	45
Cubical Toilet & Glass Holder	46
Glass Clip	47
Staircase Railing	50
Mohair	52
Clip Seal	53
Glass Cutter & Glass Suction	54
Silicone	55
Silicone Gun	58


DEKSON reserves the rights to change the design & technical specifications of the products or to make additions or improvements without any notification. If you must form a complete sets for engineering. Please contact the local distributor or our company to inquire about the accurate sizes, or measure according to the sizes of the object itself.

HYDRAULIC PATCH FITTING

Automatic Self-Closing Technology


Hydraulic patch fitting adds a convenient automatic self-closing function to your interior glass door. Hydraulic patch fitting is best used for indoor areas.

MATERIAL : COVER PLATE STAINLESS STEEL SUS 304





PTH 1080 PSS

Glass Thickness : 8 mm ~ 12 mm
Door Width : 850 mm (Max.)
Door Weight : 80 kg (Max.)
Self-closing when door is closed at 80°
☀ +40° c ❄ -15° c

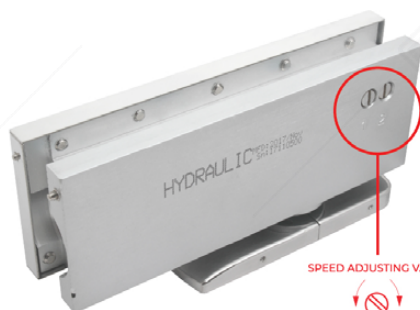

SPEED ADJUSTING VALVE

Fast Slow
NO 1: CLOSING SPEED
NO 2: LATCHING SPEED





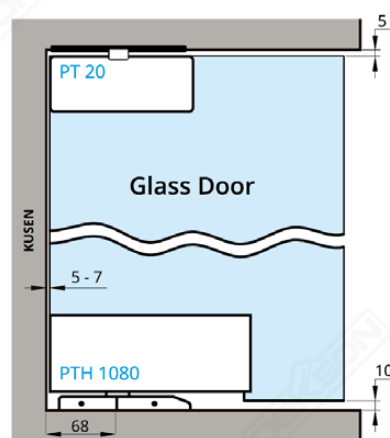


Tebal Kaca
8-13



PTH 1100 PSS

Glass Thickness : 8 mm ~ 13 mm
Door Width : 1000 mm (Max.)
Door Weight : 100 kg (Max.)
Self-closing when door is closed at 80°
☀ +40° c ❄ -15° c

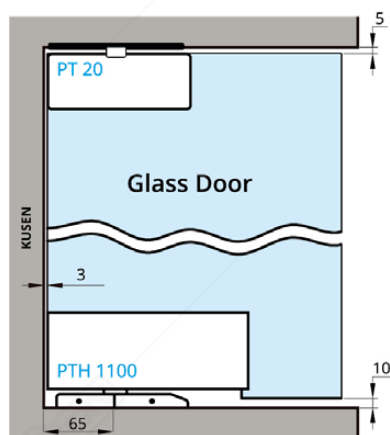

Angle Adjustment Instruction

1. Unfasten all 6 screws (1, 2, 3, 4, 5, 6) using M5 Allen Key
2. Adjust the angle, then fasten all 6 screws (1, 2, 3, 4, 5, 6) tightly



PATCH FITTING

MATERIAL : STAINLESS STEEL SUS 304





PT 10 PSS

Available :

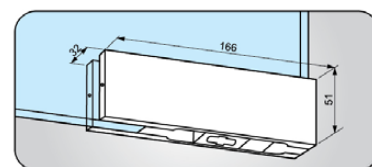



PT 20 PSS

Available :

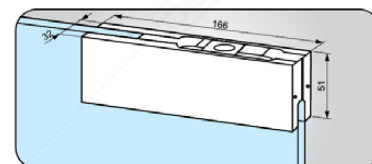



PT 30 PSS

Available :

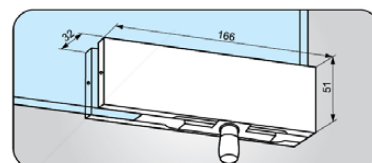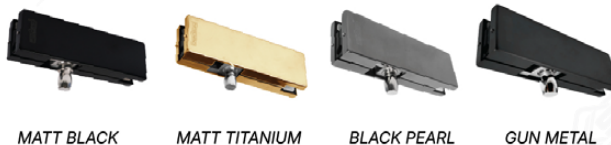

PT 40 PSS

Available :

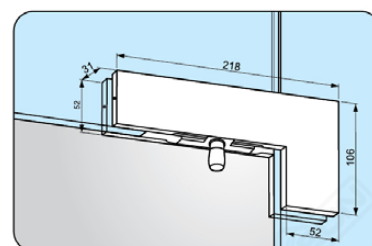



PT 24 PSS

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL




GUN METAL

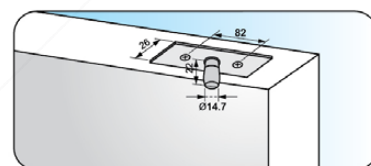

PT 24 HD SSS

HEAVY DUTY

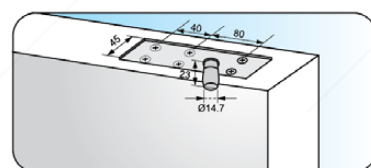

US 10 PSS

*Cylinder to be ordered separately

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

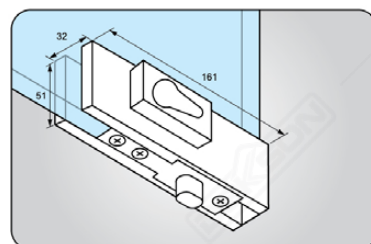


PT 41 PSS LEFT

*Available in : Right

Available :





MATT BLACK

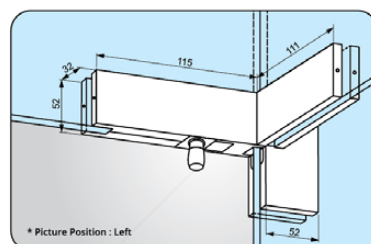

* Picture Position : Left

ILLUSTRATIONS

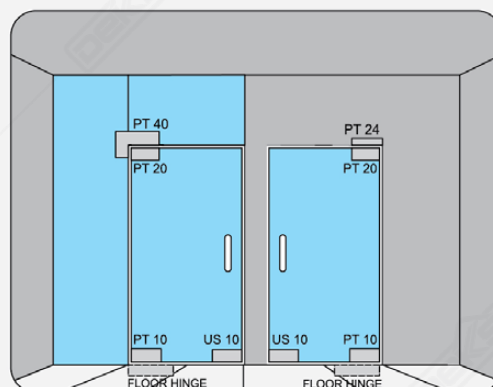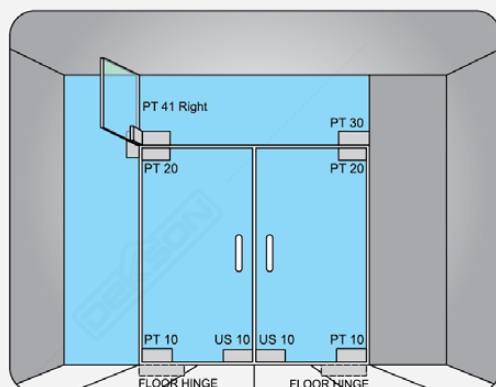

FLOOR SPRING

Certified for Optimum Operation

Floor Spring is the backbone of glass door in public facilities. Floor Spring has to withstand forces of nature such as wind, rain and storm, as well as performing hundreds to thousands of opening and closing movement everyday.

Dekson Floor Spring is up to these tasks and its quality mechanism has been certified by PSB Singapore.

MATERIAL : COVER PLATE STAINLESS STEEL SUS 304



FHA 180 SINGLE SSS
Available : FHA 180 DOUBLE SSS



ACC. STANG & ACC. TOP PIVOT
(WOODEN DOOR, ALUMINIUM,
STEEL DOOR)



CONTROLLER



REMOTE CONTROL



HUB PT10
(GLASS DOOR)

FLOOR SPRING AUTOMATIC




FHA 180 MOTION SENSOR*



FHA 180 SAFETY SENSOR*

*To Be Ordered Separately


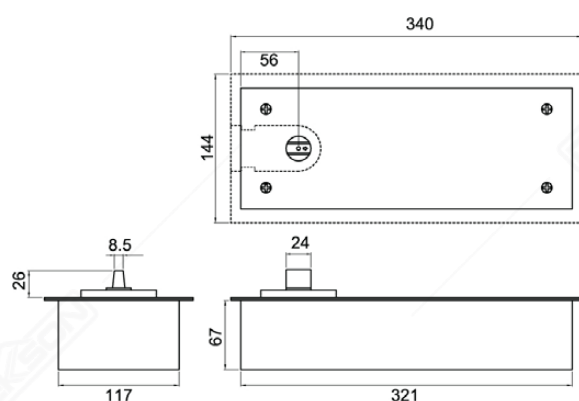




TECHNICAL PARAMETER

MODEL	FHA-DKS-180 SINGLE DOUBLE
MAX. DOOR WEIGHT (Based on 1.2m Door Width)	180 kg
MAX. DOOR WIDTH	1400 mm
MAX. TORQUE	165 Nm
POWER SUPPLY	AC110-230V $\pm 10\%$ 50/60Hz
RATED POWER	100W
STANDBY POWER	<2W
OUTPUT ELECTRIC LOCK	DC12V
DOOR TYPE	WOODEN GLASS STEEL

Accessories For Glass

ILLUSTRATION :

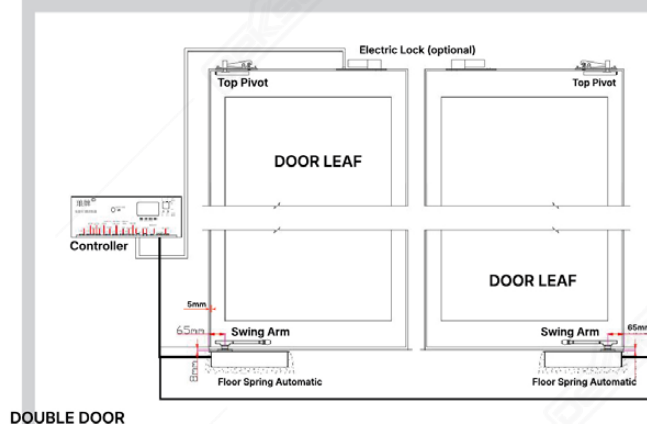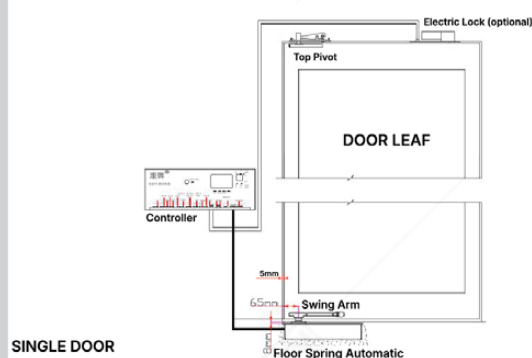

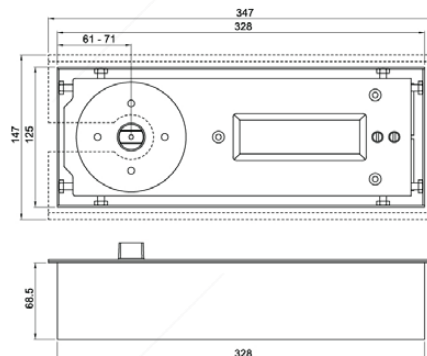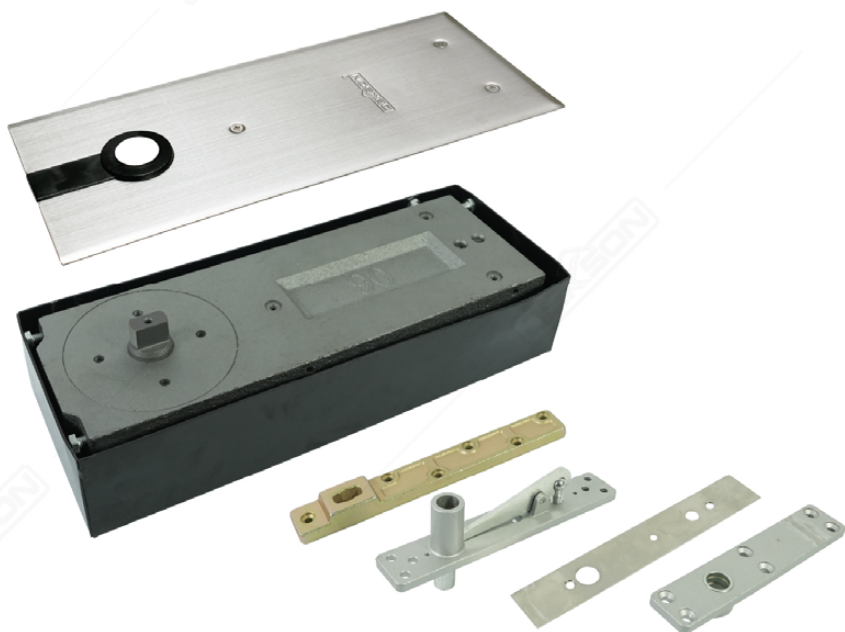

FH 600 SSS

FEATURES :


- * Support door weight up to 600 kg
- * Support door width up to 1600 mm



FH 84 BLACK PEARL

Available : • SSS

- TITANIUM
- GUN METAL
- MATT BLACK

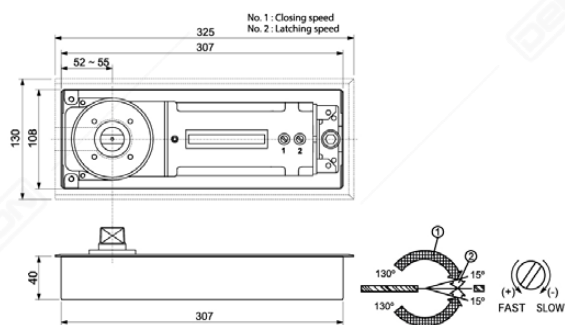

SPECIFICATION :

Type	Size	Door Weight [Max]	Door Width [Max]
FH 211 SSS	-	80 Kg	800 mm
FH 84 SSS	Normal	100 Kg	900 mm
FH 84 BD SSS			
FH 84 BD SSS w/o spindle	Normal	100 Kg	1000 mm
FH 8400 SSS			
FH 84 BD SSS	4	120 Kg	1100 mm
FH 75 SSS	-	150 Kg	1200 mm
FH 75 BD SSS			
FH 80 SSS	-	300 Kg	1500 mm
FH 80 BD SSS			
FH 600 SSS	-	600 Kg	1600 mm



FH 84 BD SSS (Body Only)



FH 84 BD SSS (w/o Spindle)

SPINDLE



COMPATIBLE FOR FH 84 BD SSS W/O SPINDLE & FH 80 SSS & FH 75 SSS
* SPINDLE CAN BE ORDER SEPARATELY





FH 80 SSS

Available : • FH 80 MATT BLACK
• FH 80 SSS

FEATURES :

- * Adjustable Spring Tension from 20 Nm to 50 Nm
- * Support door weight up to 300 kg
- * Efficiency up to 80%
- * Interchangeable spindle tips extensions up to 50 mm
- * Swing speed from 180° to 15° latch speed from 15° to 0°
- * Support door width 1500 mm

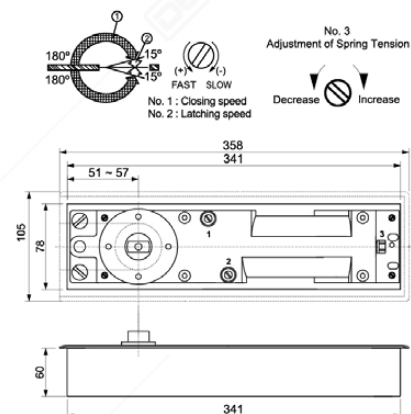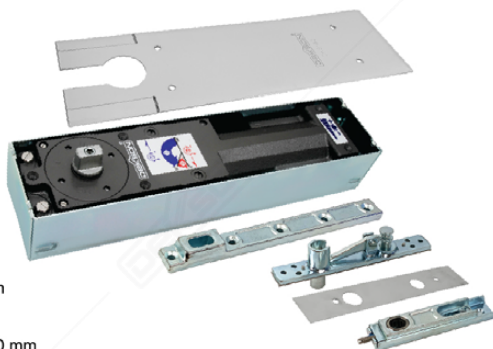


FH 75 PSS

Available : • FH 75 MATT BLACK
• FH 75 BD PSS


FEATURES :

- * Support door weight up to 150 kg
- * Support door width 1200 mm

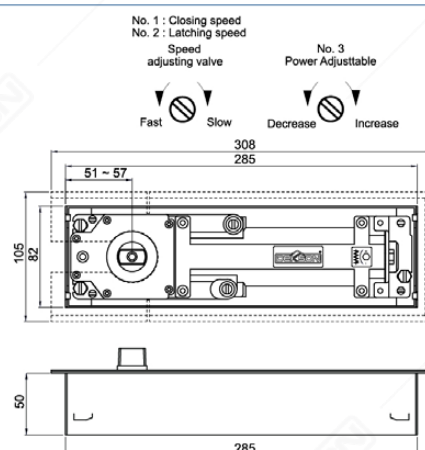

FH 211 SSS

- FEATURES :
- * Support door weight up to 80 kg
 - * Support door width 800 mm

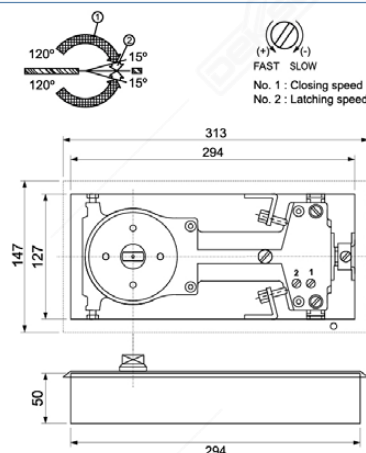

FH 8400 SSS

FLOOR SPRING SET
(FS + PF + US10 + CYL)

Accessories For Glass

PT V24 PSS

PT V10 PSS+BLACK


PT V20 PSS+BLACK

US V10 PSS+BLACK


PT FT-V30 PSS+BLACK

PT FT-V40 PSS+BLACK

* To be ordered separately



ILLUSTRATIONS

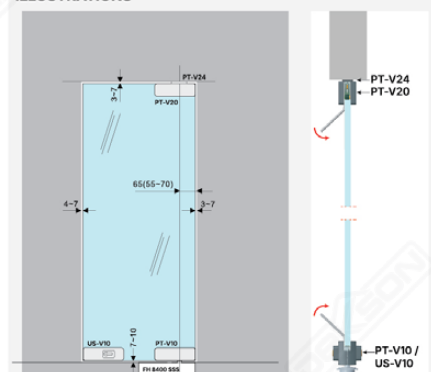

SPIDER FITTING



Formidable Support for Glass Structures

Glass structure as building exterior is an increasingly popular design trend. Dekkson spider fitting products is manufactured from high quality materials to ensure the safety and stability of glass structures. Dekkson spider fitting set can hold glass sheets that weighed up to 220 kilograms each.



MATERIAL : STAINLESS STEEL SUS 304





160 SERIES





SF 8211
160MM SSS




SF 8212
160MM SSS

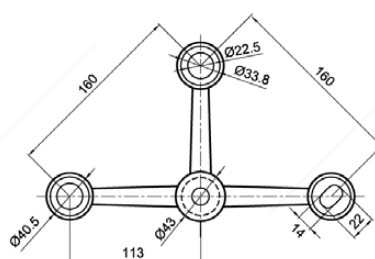


SF 8213
160MM SSS

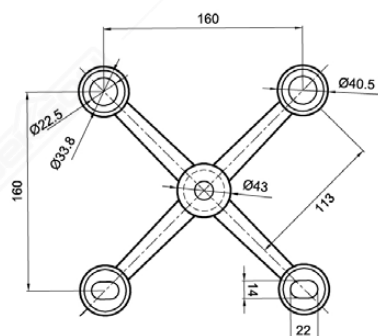

SF 8214
160MM SSS

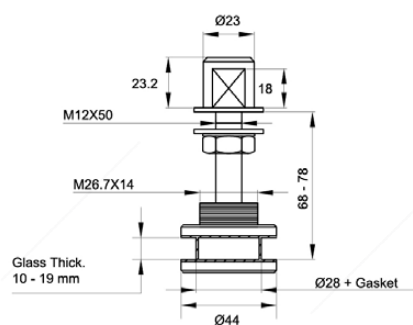

SF 8241
160MM (ROUTE) SSS



SF 8245
160MM (BASE) SSS
Material : Stainless Steel SUS 304 + Iron

220 SERIES


ILLUSTRATIONS

160 SERIES



Capacity max : 170 Kg/ Glass sheet
Glass Thickness : 10 - 19 mm

220 SERIES


Capacity max : 220 Kg/ Glass sheet
Glass Thickness : 10 - 25 mm

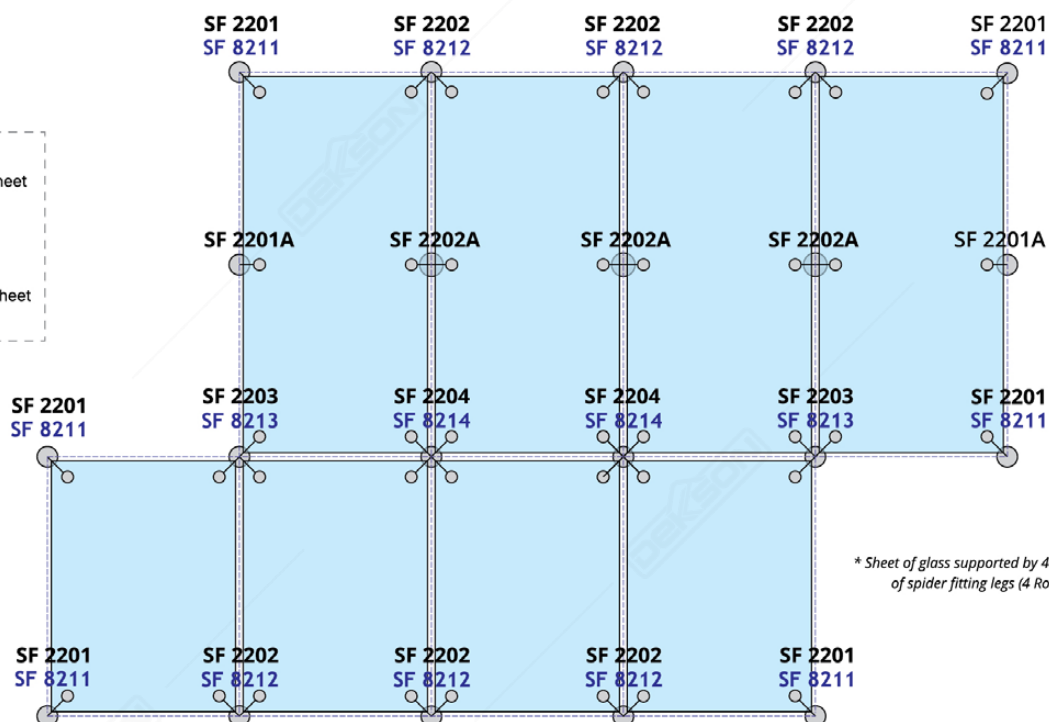



* Sheet of glass supported by 4 pieces of spider fitting legs (4 Routels).





SF 2201
220MM SSS






SF 2201A
220MM SSS





SF 2202 (90)
220MM SSS




SF 2202A (180)
220MM SSS

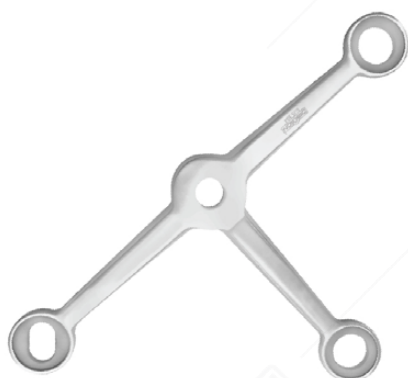


SF 2203
220MM SSS



SF 2204
220MM SSS



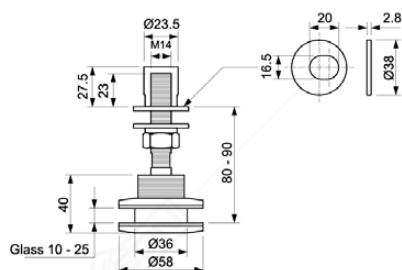


SF 2241
220MM (ROUTEL) SSS





SF 2245
220MM (BASE) SSS
Material : Stainless Steel SUS 304 + Iron



GG 220 SERIES

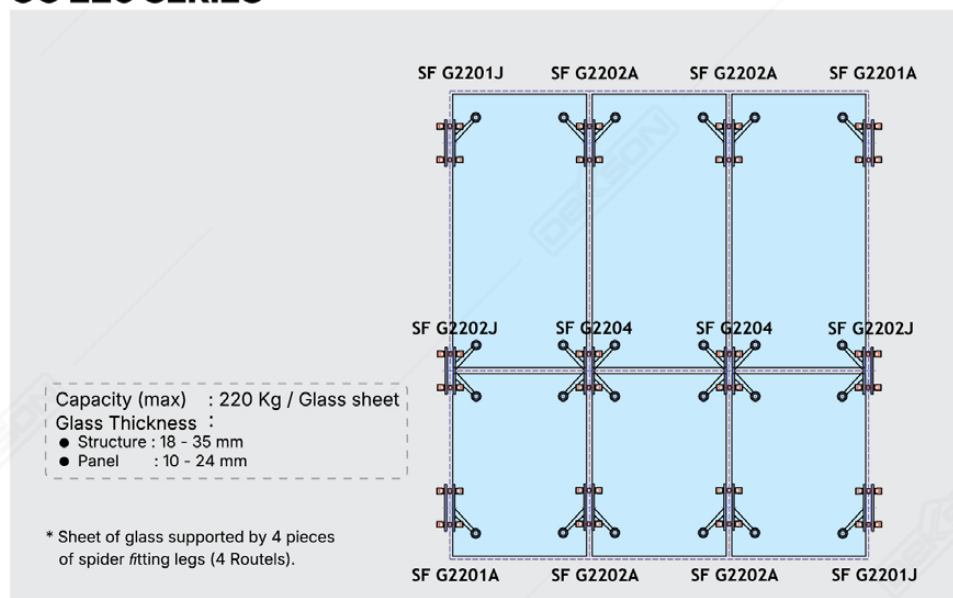



SF G2201A
GLASS STRC SSS





SF G2201J
GLASS STRC SSS




SF G2202A
GLASS STRC SSS



SF G2202J
GLASS STRC SSS



SF G2204
GLASS STRC SSS

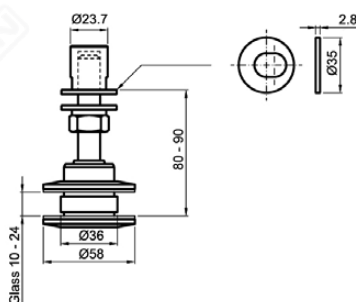

SF G2241
GLASS ROUTEL STRC SSS

KEY FOR SPIDER FITTING



ROUTEL SF 2241 PIN ATAS



BASE SF 2245 PIN ATAS




BASE SF 2245 PIN SAMPING



UNIVERSAL PIN ATAS



UNIVERSAL PIN SAMPING

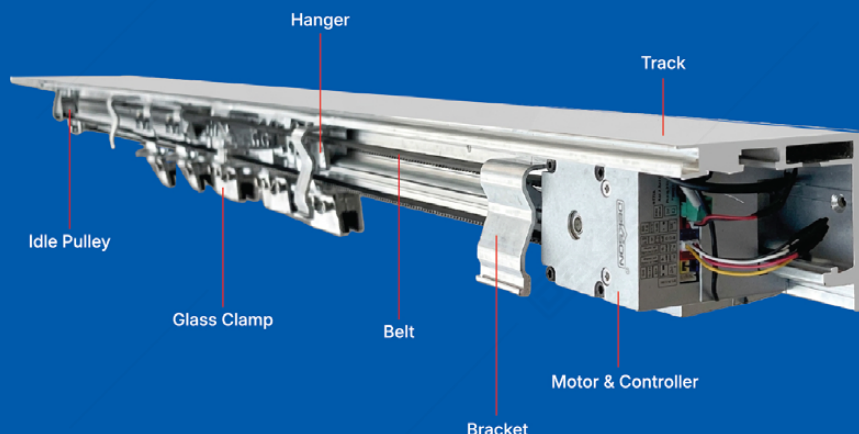

SLIDING GLASS DOOR

Automatic Sliding Door

ASD - D150 L5M

*Track Length : 5M


ASD - D150 L6M

*Track Length : 6M




SPECIFICATION :

OPENING & CLOSING TYPE	SINGLE DOOR		DOUBLE DOOR	
DOOR LEAF WEIGHT PER LEAF (KG)	180 KG		150 KG X 2	
DOOR LEAF WIDTH	5 M TRACK	6 M TRACK	5 M TRACK	6 M TRACK
	800-2000 MM		650-1275 MM	650-1525 MM
DOOR OPENING/CLOSING SPEED	200 MM/S ~ 500 MM/S			
DOOR OPEN HOLD TIME	0 ~ 30 SECONDS (ADJUSTABLE)			
INPUT VOLTAGE	220 V AC			
MAXIMUM INPUT POWER	250W			
MANUAL PUSH FORCE	≤25 N		≤40 N	
MOTOR TYPE	PMSM			
MAXIMUM TORQUE	3.5 N.m			

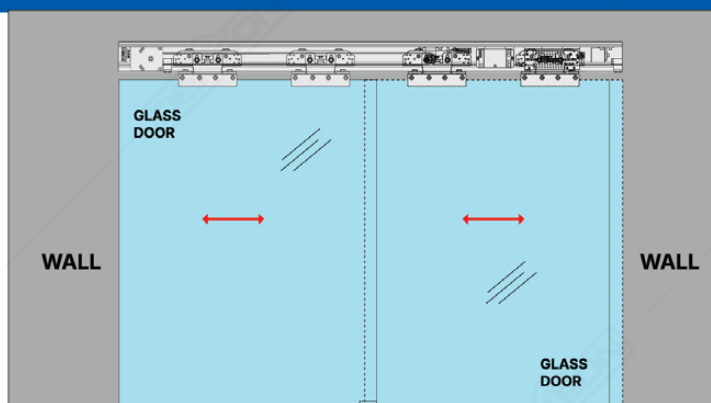

FEATURES :

- SMART CONTROLLER WITH MOBILE APP
- MICROWAVE MOTION SENSOR TECHNOLOGY
- DURABLE PERMANENT MAGNET SYNCHRONOUS DC MOTOR
- INTELLIGENT SAFETY SENSOR SYSTEM
- ADJUSTABLE SPEED & HOLD OPEN TIME
- CAPACITY MAX 150 KG / LEAF
- SUITABLE FOR SINGLE & DOUBLE SLIDING DOOR
- OVERHEAD INSTALLATION
- AUTOMATIC DOOR LOCKING SYSTEM
- SMOOTH & QUIET OPERATION



TRACK & COVER
(5m & 6m)



MOTOR & CONTROLLER
(1 pc)



IDLE PULLEY
(1 pc)



ELECTRIC MAGNETIC LOCK
(1 pc)



POWER SUPPLY
(1 pc)



HANGER ROLLER
(4 pcs)



GLASS CLAMP
(4 pcs)



BRACKET
(3 pcs)



BELT BRACKET
(2 pcs)



STOPPER
(3 pcs)




FLOOR GUIDE
(2 pcs)



SAFETY BEAM
(1 set)



REMOTE CONTROL
(2 pcs)



BELT
(1 pc)





MOTION SENSOR
(2 pcs)

Accessories For Glass


SLIDING GLASS DOOR

Automatic Sliding Door
ASD-D120B L4.2M

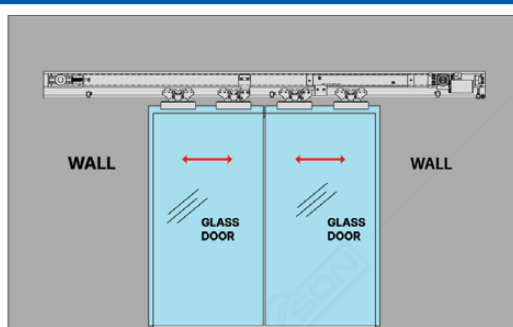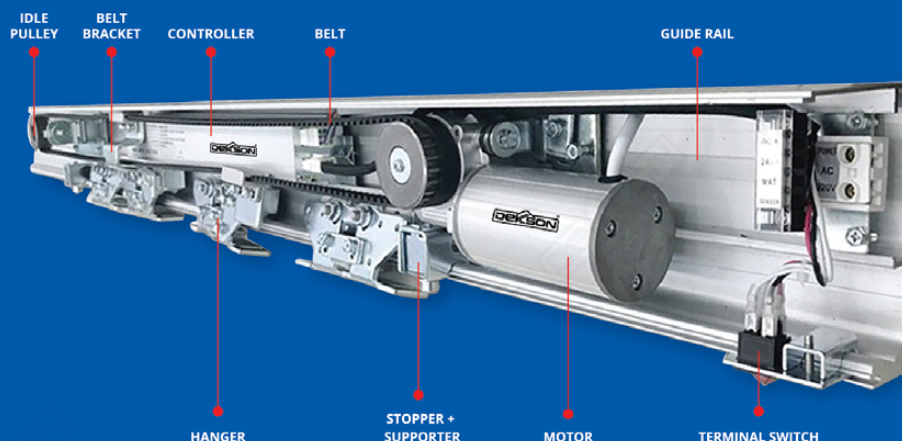

SPECIFICATION :

DOOR LEAF	SINGLE LEAF	DOUBLE LEAF
WEIGHT OF DOOR LEAF	MAX. 150 KG	MAX. 2x120 KG
WIDTH OF DOOR LEAF	DW = 750 - 1600 MM	DW = 650 - 1050 MM
WIDTH OF DOOR OPENING	W = MAX. 1550 MM	W = MAX. 2000 MM
SUPPLY POWER VOLTAGE	AC 220V±10%, 50/60 HZ	
OPENING SPEED	150-460 MM/S (ADJUSTABLE)	
MOTOR	(BRUSHLESS) DC 24 V, 60-70W	

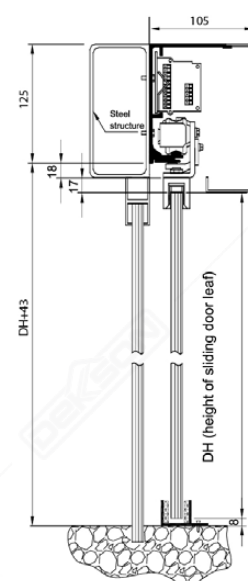

GUIDE RAIL + COVER
(4200 MM)

MOTOR (1 pc)

IDLE PULLEY (1 pc)

HANGER (4 pcs)

STOPPER + SUPPORTER
(3 sets)

BELT BRACKET R & L
(1 set)

GLASS CLAMP (4 pcs)

FLOOR GUIDE (1 set)

SAFETY BEAM
SENSOR (1 set)

REMOTE FOR
DOOR SETTING (1 set)

TERMINAL SWITCH
(1 pc)

BELT (1 pc)

MOTION SENSOR (2 pcs)

CONTROLLER (1 pc)

ADDITIONAL ACCESSORIES :



SAFETY BEAM*
(DOUBLE) IR (1 set)



MOTION & SAFETY*
SENSOR



PROGRAM SWITCH*
FIVE RANGE



LITHIUM POWER*
BACKUP DC 24V,
2.6A+BRACKET



ELECTRONIC*
DROPBOLT LOCK



DISABLE BUTTON*
SWITCH



SAFETY BEAM (SINGLE) IR*
(1 set)



WIRELESS PUSH*
BUTTON SWITCH



WIRELESS HAND WAVE SENSOR SWITCH*
WHS 802 BLACK



WIRELESS HAND WAVE SENSOR SWITCH*
WHS 803 BLACK

*To Be Ordered Separately

SLIDING GLASS TELESCOPIC

SGT 4100 (3+1) NA



LUG HOLDER
(1 pc)



ROLLER
(6 pcs)



STOPPER
(6 pcs)



FLOOR GUIDE
(2 pcs)



FLOOR GUIDE FIX
(1 pc)



SINGLE HOLE LUG
(2 pcs)



DOUBLE HOLE LUG
(2 pcs)



STEEL ROPE
Ø1.5mm X 2.5m
(2 pcs)



HYDRAULIC DAMPER
(3 pcs)



GLASS CLIP GLASS DOOR 1
(1 pair)




GLASS CLIP GLASS DOOR 2
(2 pairs)



SLIDING LOCK (1 set)

TRACK FOR SGT 4100 (3+1) NA + COVER

*Track & Cover to be order separately

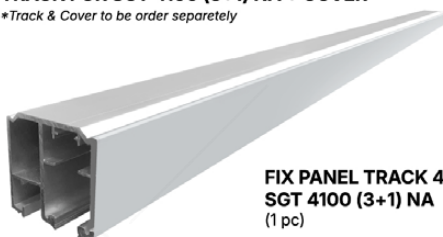

FIX PANEL TRACK 4M
SGT 4100 (3+1) NA
(1 pc)



DOOR PANEL TRACK 4M
SGT 4100 (3+1) NA
(2 pcs)





COVER TRACK 4M
SGT 4100 (3+1) NA
(2 pcs)

ILLUSTRATIONS

Glass Thickness:
10-12 mm

Weight Glass Door / leaf :
80 kg

Width Opening:
4000 mm

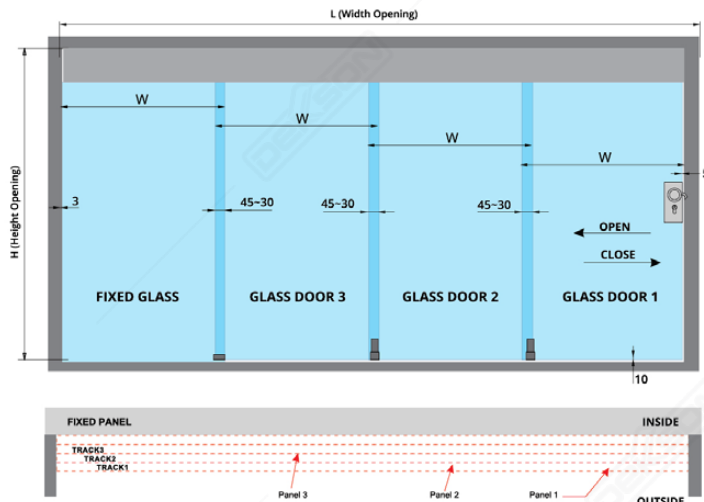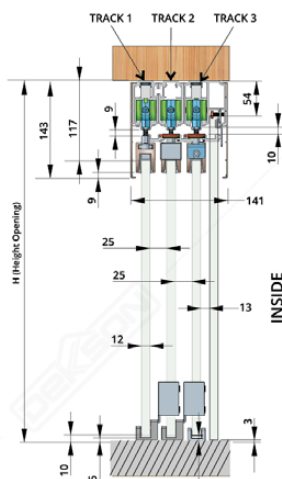

SLIDING GLASS TELESCOPIC

SGT 3100 (2+1) NA



LUG HOLDER
(1 pc)



ROLLER
(4 pcs)



STOPPER
(4 pcs)



FLOOR GUIDE
(1 pcs)



FLOOR GUIDE FIX
(1 pc)



SINGLE HOLE LUG
(1 pc)



DOUBLE HOLE LUG
(1 pc)



STEEL ROPE
Ø1.5mm X 2.5m
(1 pc)



HYDRAULIC DAMPER
(2 pcs)



GLASS CLIP GLASS DOOR 1
(1 pair)




GLASS CLIP GLASS DOOR 2
(1 pair)



SLIDING LOCK (1 set)

TRACK FOR SGT 3100 (2+1) NA + COVER

*Track & Cover to be order separately

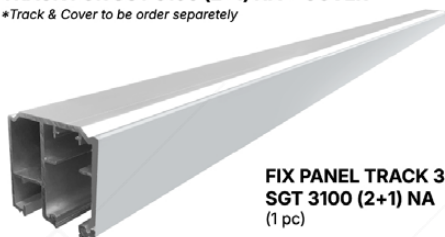

FIX PANEL TRACK 3M
SGT 3100 (2+1) NA
(1 pc)



DOOR PANEL TRACK 3M
SGT 3100 (2+1) NA
(2 pcs)





COVER TRACK 3M
SGT 3100 (2+1) NA
(2 pcs)

ILLUSTRATIONS

Glass Thickness:
10-12 mm

Weight Glass Door / leaf :
80 kg


Width Opening:
3000 mm

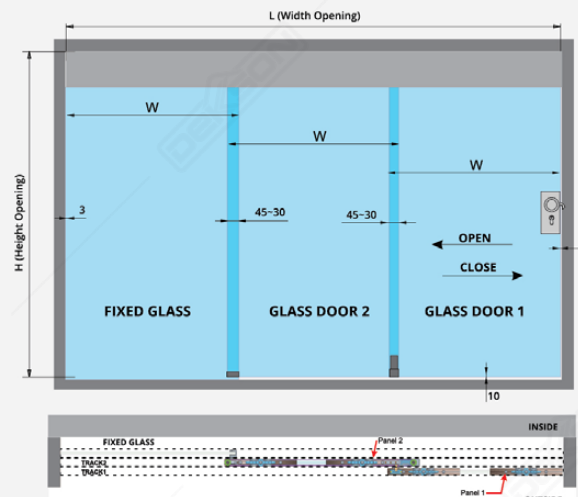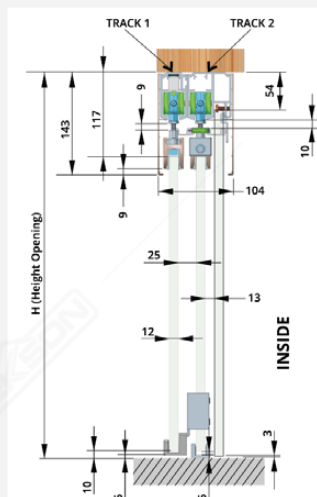

SLIDING GLASS DOOR

Deluxe Magtec SD12 ACC SSS

MATERIAL : STAINLESS STEEL SUS 304

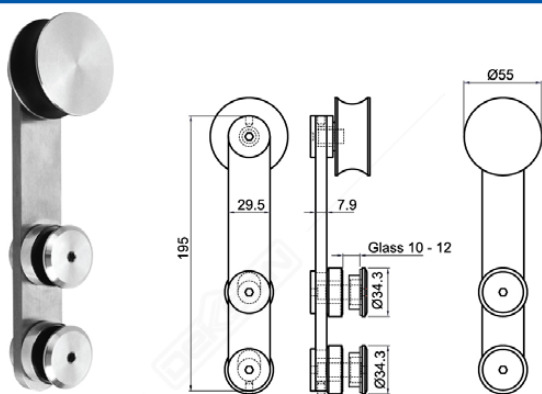

ROLLER FOR TUBE
(2 pcs)



TUBE COVER
(2 pcs)




TUBE CONNECTOR (GG)
(4 pcs)



FLOOR GUIDE
(1 pc)



STOPPER (LEFT/RIGHT)
(2 pcs)

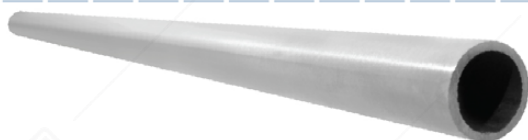

TUBE






TUBE CONNECTOR
ACC SD 204 (GW)

*to be ordered separately

ILLUSTRATIONS









Capacity (max):
65 Kg / Glass sheet

Glass Thickness:
10 - 12 mm

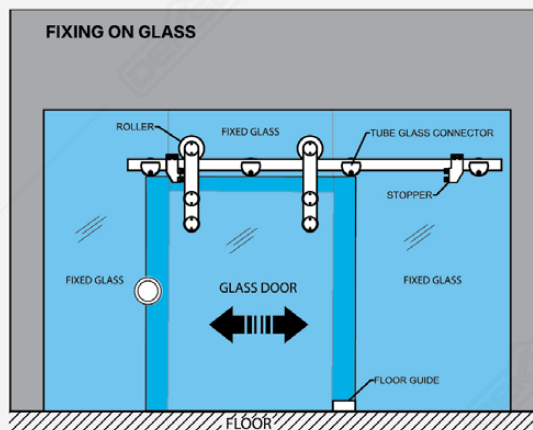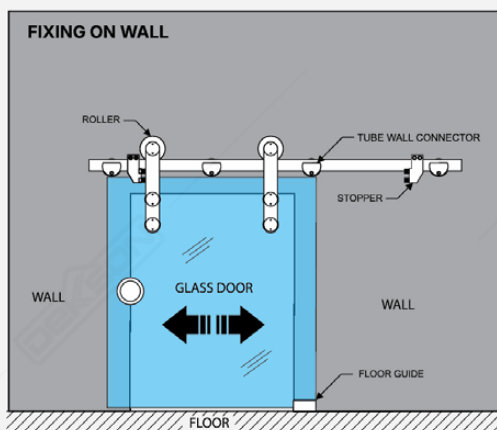

SLIDING GLASS DOOR

Hydraulic Soft Closer
SLD HYD8970A SSS

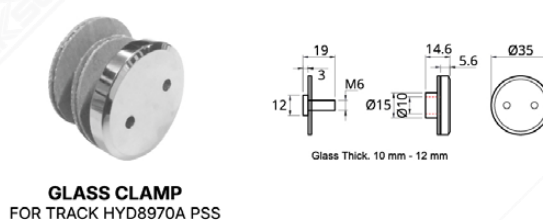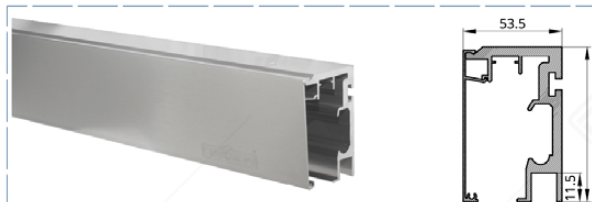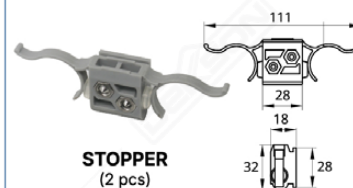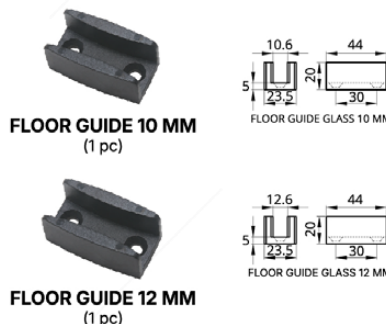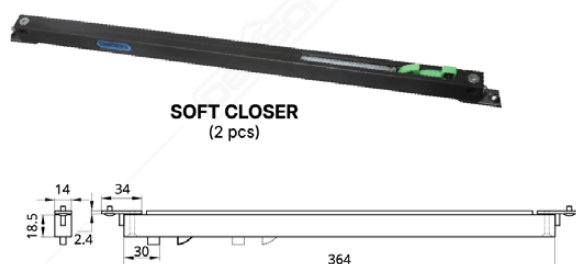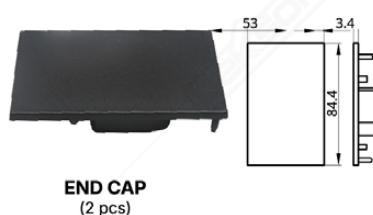
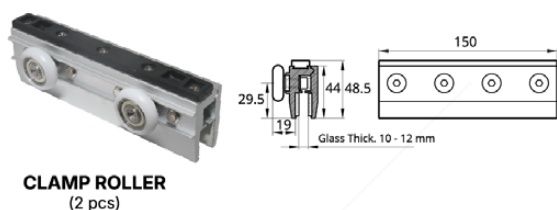


*to be ordered separately



ILLUSTRATIONS

Capacity (max) : 120 kg
Glass Thickness : 10 - 12 mm


Fixing On WALL

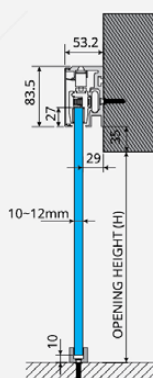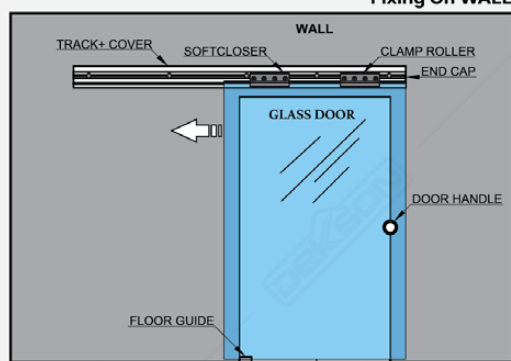


Fixing On glass

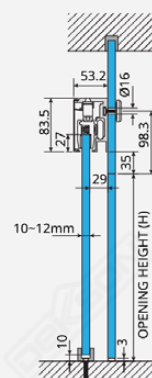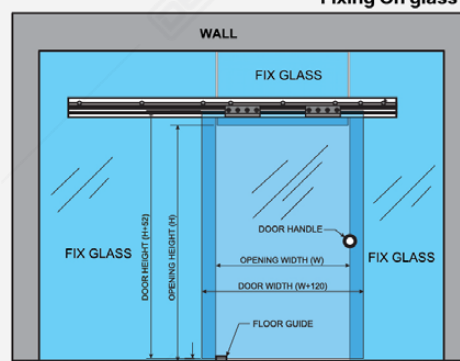

L4
SGD ACC L4 8207A SET

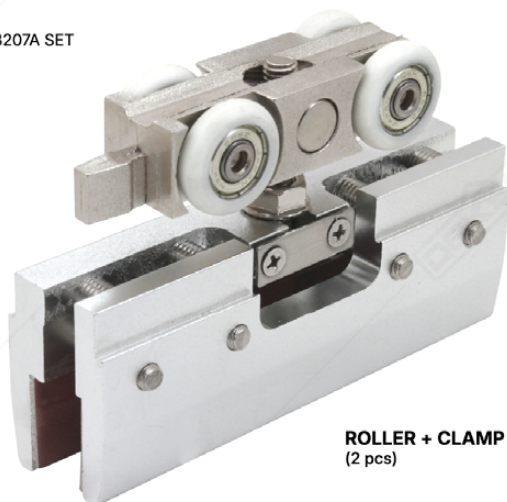

ROLLER + CLAMP
(2 pcs)

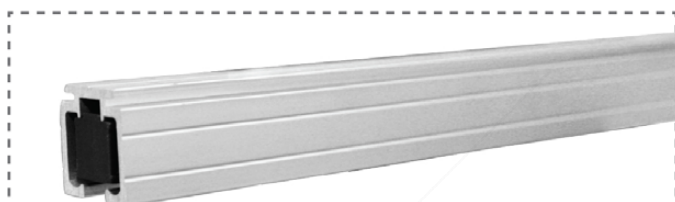


TR D6 (S6/L6/L4) 2M 5 BRACKET
TR D6 (S6/L6/L4) 3M 7 BRACKET

** to be ordered separately.*

Type	Max. Capacity	Glass thickness	Track
L4	100 kg	10 - 12 mm	2000/3000 mm



STOPPER
(2 pcs)





FLOOR GUIDE INSET 10 MM
(1 pc)




FLOOR GUIDE
(1 pc)




FLOOR GUIDE INSET 12 MM
(1 pc)

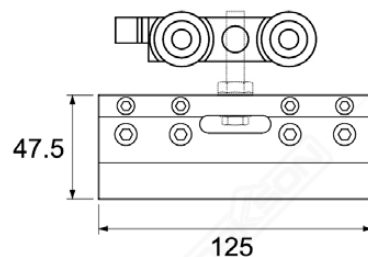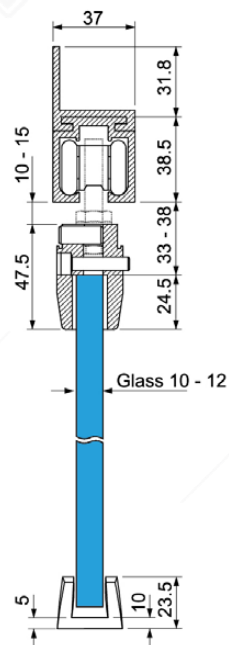

L6
SGD ACC 8922-57 COMPLETE SET

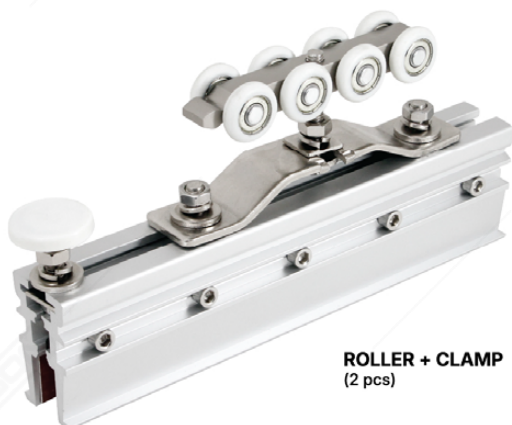

ROLLER + CLAMP
(2 pcs)

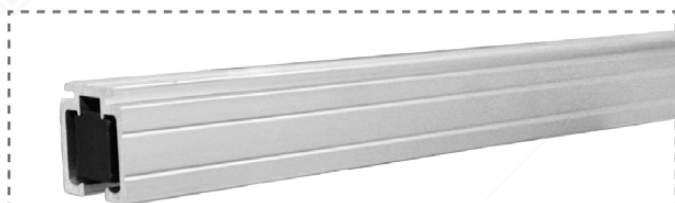


TR D6 (S6/L6/L4) 2M 5 BRACKET
TR D6 (S6/L6/L4) 3M 7 BRACKET

** to be ordered separately.*

Type	Max. Capacity	Glass thickness	Track
L6	150 kg	10 - 12 mm	2000/3000 mm



STOPPER
(2 pcs)





FLOOR GUIDE INSET 10 MM
(1 pc)



FLOOR GUIDE
(1 pc)



FLOOR GUIDE INSET 12 MM
(1 pc)

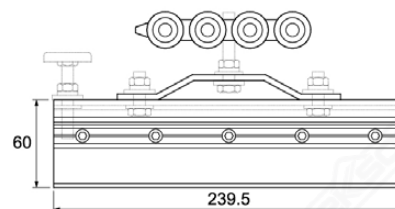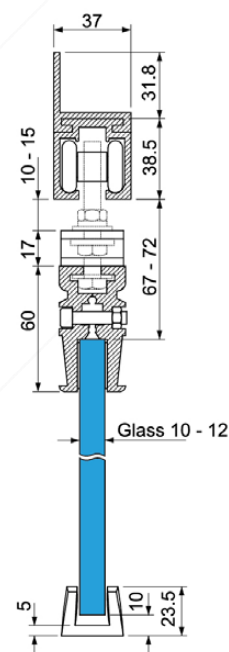

S6
SGD ACC 8922-63 COMPLETE SET



ROLLER + CLAMP
(2 pcs)



STOPPER
(2 pcs)





**FLOOR GUIDE
INSET 10 MM**
(1 pc)



FLOOR GUIDE
(1 pc)



**FLOOR GUIDE
INSET 12 MM**
(1 pc)

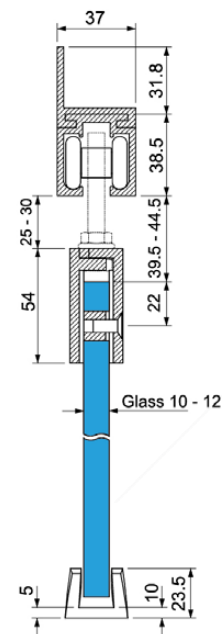


TR D6 (S6/L6/L4) 2M 5 BRACKET
TR D6 (S6/L6/L4) 3M 7 BRACKET

** to be ordered separately.*

Type	Max. Capacity	Glass thickness	Track
S6	120 kg	10 - 12 mm	2000/3000 mm


SR 89-2280-4RD SSS SET

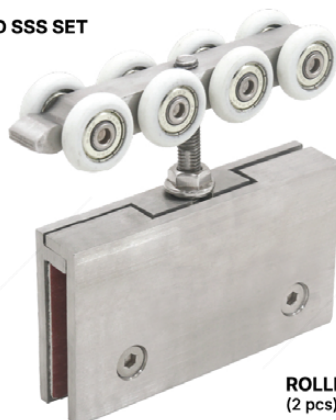

ROLLER + CLAMP
(2 pcs)



STOPPER
(2 pcs)





**FLOOR GUIDE
INSET 10 MM**
(1 pc)



FLOOR GUIDE
(1 pc)



**FLOOR GUIDE
INSET 12 MM**
(1 pc)

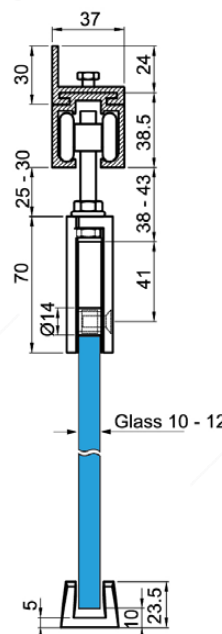

TR D6 (S6/L6/L4) 2M 5 BRACKET
TR D6 (S6/L6/L4) 3M 7 BRACKET

** to be ordered separately.*

Type	Max. Capacity	Glass thickness	Track
SR 89 2280-4RD	200 kg	10 - 12 mm	2000/3000 mm

SLIDE & FOLD GLASS DOOR

SLF 8610

MATERIAL : STAINLESS STEEL SUS 304



TOP ROLLER & TOP PIVOT HINGE



PV 861020 SSS



RH 86103 SSS



NH86102 SSS



RH 86102 SSS



RH 86101 SSS

BOTTOM HINGE & LOCK BOLT HINGES & BOTTOM PIVOT HINGE



PV 861010 SSS



LH 861030 SSS



LH 86102 SSS



GH 861040 SSS



GH 8610401 SSS



LH86101 SSS



DP 89001WS SSS
BOLT KEEPER WITH DUST PROOF



TRACK 5,8M NA

Available : • 2 M
• 3,8 M



U-CHANNEL

19.5x19.5x1.8x4.5M NA
Available : 19.5x19.5x1.8x2.25 M




**DYNASET M8X30+
BOLT M8X20**

ILLUSTRATIONS



Height Max : 2700 mm
Width Max : 800 mm
Glass Thickness : 10 mm & 12 mm
Weight Max : 65 kg / panel
Max. Leaf per set : 7 panel

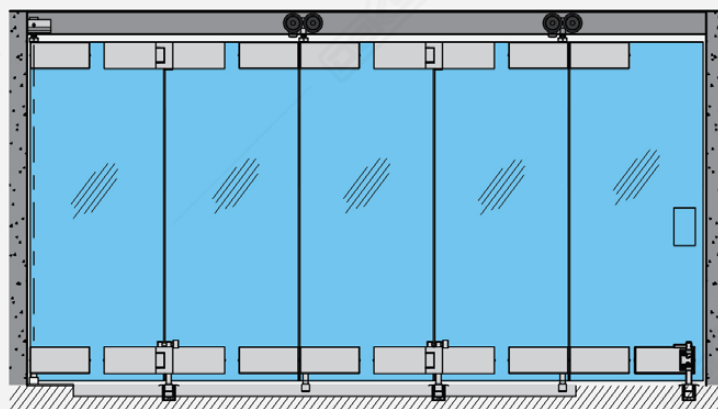

PULL HANDLE

Quality Design and Quality Finishing

With simplistic design and a quality finishing, Dekkson pull handle for glass door blend well with the overall style of modern glass doors. Dekkson pull handle for glass door is manufactured from stainless steel SUS 304 its quality will enhance glass doors aesthetic and function.



PSS

Available color:



WHITE



MATT BLACK



GUN METAL



BLACK PEARL


PH DL801 SERIES

SIZE DESCRIPTION (in mm)

PH DL801 (D) X (L) X (C) (L) = (D) + (C)

Available :

- PH DL801 25X325X300 WHITE (H = 72)
- PH DL801 25X325X300 GUN METAL (H = 72)
- PH DL801 25X325X300 MATT BLACK (H = 72)
- PH DL801 25X325X300 BLACK PEARL (H = 82)
- PH DL801 32X382X350 WHITE (H = 82)
- PH DL801 32X382X350 GUN METAL (H = 82)
- PH DL801 32X382X350 MATT BLACK (H = 82)
- PH DL801 32X382X350 BLACK PEARL (H = 82)
- PH DL801 25X225X200 PSS (H = 70)
- PH DL801 32X382X350 PSS (H = 82)
- PH DL801 32X432X400 PSS (H = 82)
- PH DL801 32X482X450 PSS (H = 82)
- PH DL801 32X532X500 PSS (H = 82)
- PH DL801 32X632X600 PSS (H = 82)



PSS

Available color:



WHITE



MATT BLACK



GUN METAL



BLACK PEARL


PH DL809 SERIES


SIZE DESCRIPTION (in mm)

PH DL809 (D) X (L) X (C) (L) = (D) + (C)

Available :

- PH DL809 25X325X300 WHITE (H = 72)
- PH DL809 25X325X300 GUN METAL (H = 72)
- PH DL809 25X325X300 MATT BLACK (H = 72)
- PH DL809 25X325X300 BLACK PEARL (H = 72)
- PH DL809 32X382X350 WHITE (H = 80)
- PH DL809 32X382X350 GUN METAL (H = 80)
- PH DL809 32X382X350 MATT BLACK (H = 80)
- PH DL809 32X382X350 BLACK PEARL (H = 80)
- PH DL809 32X332X300 SSS (H = 80)
- PH DL809 32X332X300 PSS (H = 80)
- PH DL809 32X382X350 SSS (H = 80)
- PH DL809 32X382X350 PSS (H = 80)



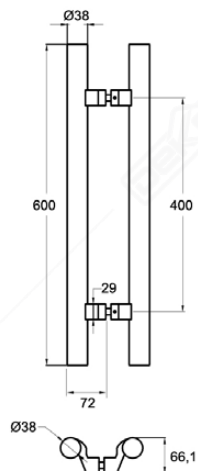


PH DL810

38x600x400 PSS+SSS

Available : • 38x800x600 PSS+SSS
• 38x1000x800 PSS+SSS

Material : SUS 304

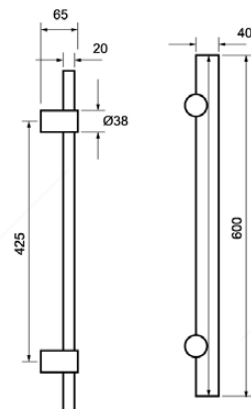


PH DL441

20X38X600X425 PSS+SSS

Available : 20x38x800x625 PSS+SSS

Material : SUS 304

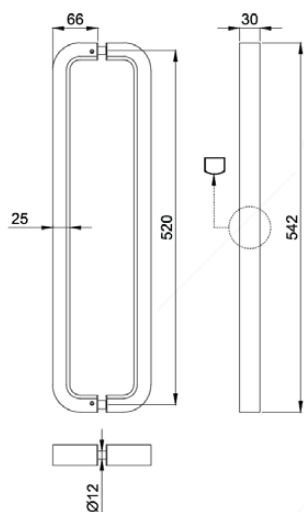


PH DL5801

30X25X542X520 PSS

Available : • 30X25X542X520 SSS
• 30X25X542X520 MATT BLACK
• 30X25X542X520 TITANIUM GOLD
• 30X25X542X520 GUN METAL

Material : SUS 304



PH DL1831

25X500X235 PSS+SSS

Available : 32X500X235 PSS+SSS
Material : SUS 304


PH DL814 SQ

25X25X(525/225)X(500X200) PSS

Available in :

19X19X(519/219)X(500X200) PSS

Material : SUS 304

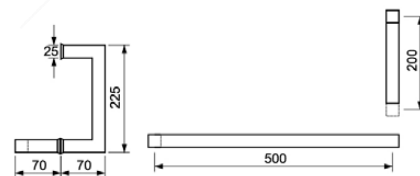


PH DL814

25X(475/175)X(450X150) PSS

Available in :

25X(525/225)X(500X200) PSS


Material : SUS 304

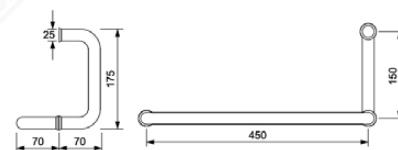

PH DL814

25X(475/175)X(450X150) MATT BLACK


Material : SUS 304

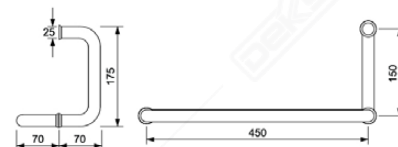

PH DL814

25X(525/225)X(500X200) GM

Material : SUS 304

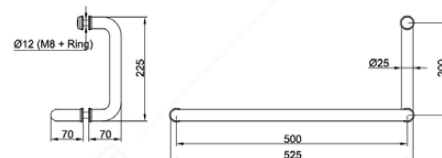


PH SQ 12X12X619X600 + 830 BR

Profile Dimension : 12X12 mm

Material : Brass

Available :

- Chrome Polish
- Brush Gun Metal
- Satin Brass

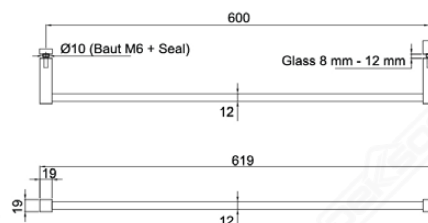

DOOR KNOB

Grip and Slide


Dekkson offer various design for glass door knob, but in general it has a minimalistic-modern design. It is a perfect fit for seamlessly styled contemporary building. And just like every other products from Dekkson, it has a highly dependable quality.



DK AL 82801 CP
Material : Aluminium




DK AL 82801 MATT BLACK
Material : Aluminium



DK AL 82803 CP
Material : Aluminium




DK AL 82803 MATT BLACK
Material : Aluminium




DK AL 82808 CP
Material : Aluminium




DK AL 82808 MATT BLACK
Material : Aluminium



DK 8716 58 MM SSS
Material : Stainless Steel SUS 304



DK 830 BR
Available : • Chrome Polish
• Brush Gun Metal
• Satin Brass
Material : Brass



LUXURIOUS
SERIES

SLIDING GLASS LOCK & GLASS DOOR LOCK


Security, alongside of aesthetic and functionality, is an essential element that must not be neglected on doors. Dekkson glass lock variants are assembled from high quality materials, exhibiting both dependable mechanism and fine design.



SGL 7600 SUS 304 (GW) SSS

Material : Stainless Steel SUS 304
Glass Thickness : 10-12mm


* Cylinder DC DL 55 mm SN to be ordered separately

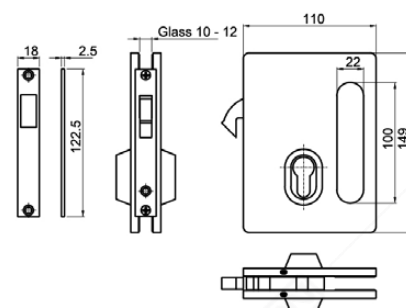

SGL 7601 SUS 304 (GG) SSS

Material : Stainless Steel SUS 304
Glass Thickness : 10-12mm


* Cylinder DC DL 55 mm SN to be ordered separately

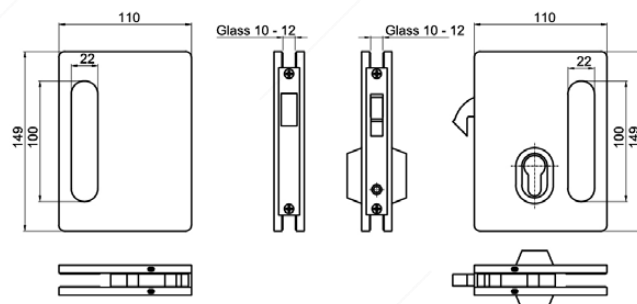


SGL 8656 (GW) SSS

Material : Stainless Steel SUS 304
Glass Thickness : 10-12mm

* Cylinder to be ordered separately

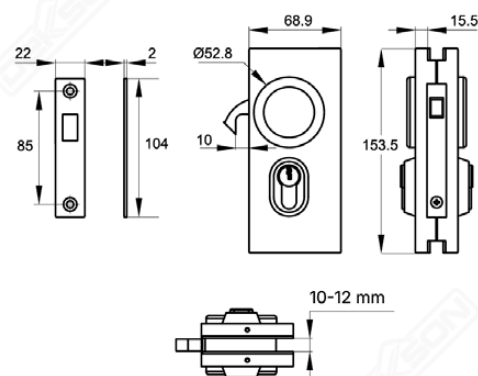


Accessories For Glass




SGL 8656 (GG) SSS - KEEPER

Material : Stainless Steel SUS 304
Glass Thickness : 10-12mm

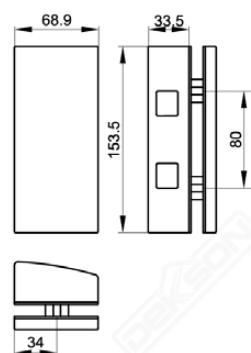


SGL 8656 (GG) SSS FIX - KEEPER

Material : Stainless Steel SUS 304
Glass Thickness : 10-12mm




GDL 38225 PSS

Material : Stainless Steel SUS 304
Glass Thickness : 10-12mm




GDL 38225A PSS

Material : Stainless Steel SUS 304
Glass Thickness : 10-12mm

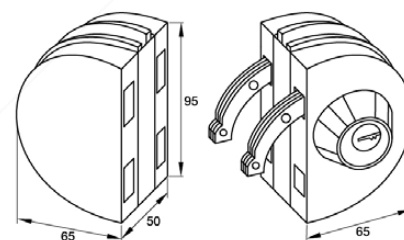


GDL 38231 PSS

Material : Stainless Steel SUS 304
Glass Thickness : 10-12mm

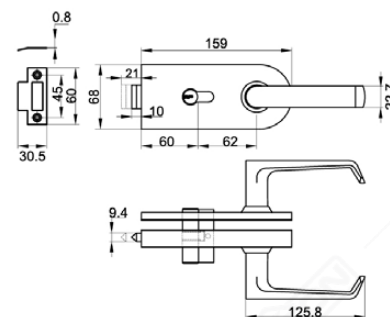


GDL 8037D (GW) SSS

Material : Stainless Steel SUS 304
Glass Thickness : 10-12mm




GDL 8037D (GG) SSS - KEEPER

Material : Stainless Steel SUS 304
Glass Thickness : 10-12mm

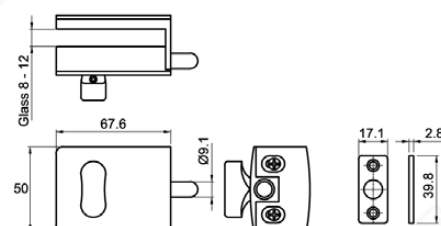


GL 8600C CP

Material : Zinc Alloy
Glass Thickness : 8-12mm




8601C CP KEEPER

Material : Zinc Alloy
Glass Thickness : 8-12mm

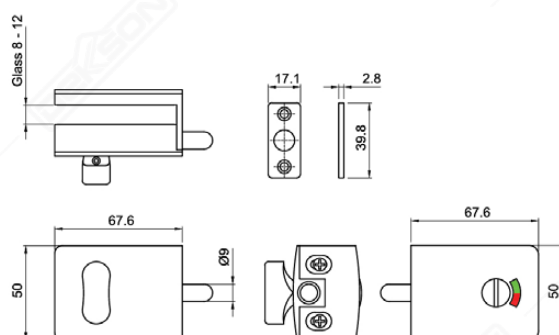


IL 8620 CP

Material : Zinc Alloy
Glass Thickness : 8-12mm

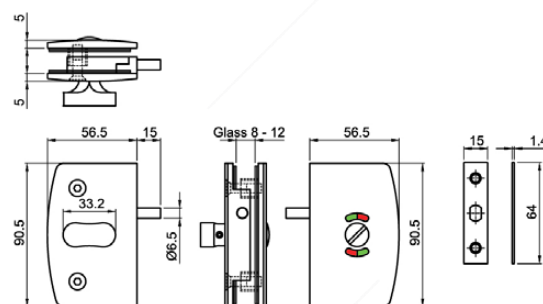


IL 8800 GW CP

Material : Brass
Glass Thickness : 8-12mm

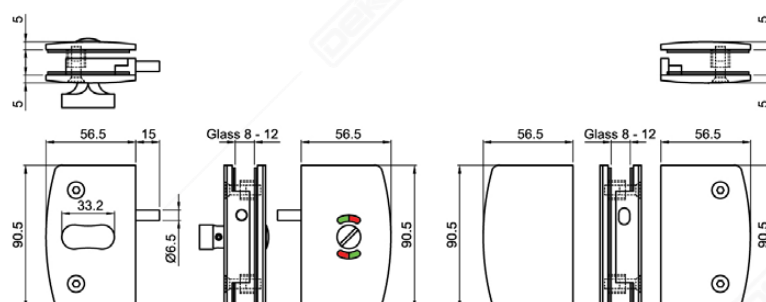


IL 8801 GG CP

Material : Brass
Glass Thickness : 8-12mm

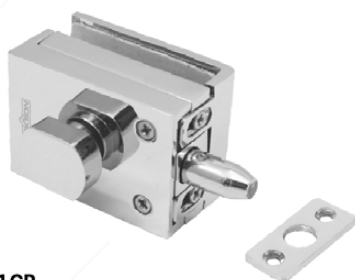


GL 621 CP

Material : Zinc Alloy
Glass Thickness : 8-12mm

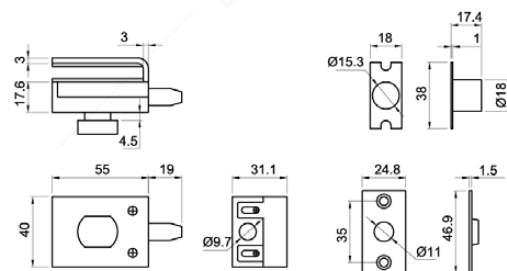


GL 621-1 CP

Material : Zinc Alloy
Glass Thickness : 8-12mm




GL 622 CP

Material : Brass
Glass Thickness : 8-10mm



GL 622-1 CP

Material : Brass




KLV 022GL SSS

Material : Stainless Steel SUS 304
Glass Thickness : 8-12mm

Available color :



KLV 022GL MATT BLACK

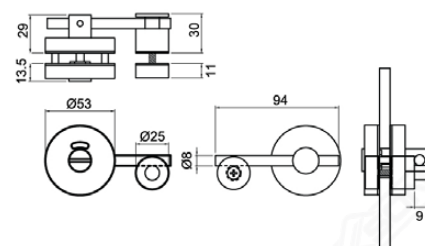


SHOWER DOOR

Stay Clean, Stay Comfortable

Modern shower room design usually separate dry areas and wet areas using glass separators. Dekkson shower door accessories support the glass elements in shower room to create a satisfyingly aesthetic and convenient personal area in houses and apartments. Dekkson present various shower hinges and sliding shower door sets, all of which has high dependability and value for money.




SHOWER HINGE HYDRAULIC

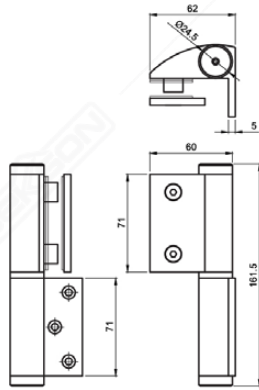

SHH AL 502 (GW) MATT BLACK (GLASS TO WALL)

Available color : CP


Available : • Left Out • Right Out
• Left In • Right In

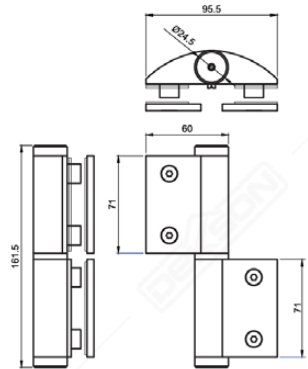

SHH AL 503 MATT BLACK (GLASS TO GLASS)


Available color : CP

Available : • Left
• Right

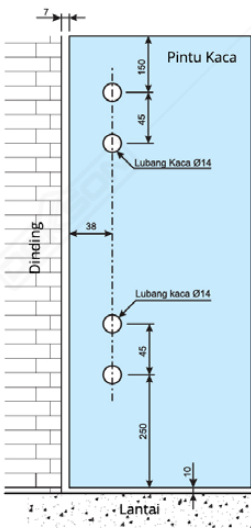


ILLUSTRATIONS


OPEN OUTSIDE



OPEN INSIDE




Material : Aluminium
Glass Thickness : Min. 8-12 mm
Max. Door Weight : 60 kg / pairs
Max. Door Height : 2000 mm
Max. Door Width : 900 mm
Max. Door Opening : 150°
Hold Open : 90°
Adjust Speed & Power

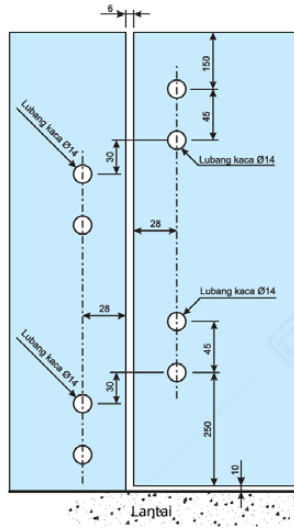


ILLUSTRATIONS

OPEN OUTSIDE



OPEN INSIDE



Material : Aluminium
Glass Thickness : Min. 8-12 mm
Max. Door Weight : 60 kg / pairs
Max. Door Height : 2000 mm
Max. Door Width : 900 mm
Max. Door Opening : 150°
Hold Open : 90°
Adjust Speed & Power

CARA PENGATURAN KECEPATAN & KEKUATAN



• Putar searah jarum jam untuk kekuatan menutup yang lebih kuat
• Putar berlawanan arah jarum jam untuk kekuatan menutup yang lebih ringan



• Putar searah jarum jam untuk kecepatan menutup yang lebih pelan
• Putar berlawanan arah jarum jam untuk kecepatan menutup yang lebih cepat

CARA PENGATURAN KECEPATAN & KEKUATAN



• Putar searah jarum jam untuk kekuatan menutup yang lebih kuat
• Putar berlawanan arah jarum jam untuk kekuatan menutup yang lebih ringan





• Putar searah jarum jam untuk kecepatan menutup yang lebih pelan
• Putar berlawanan arah jarum jam untuk kecepatan menutup yang lebih cepat

SHOWER HINGE HYDRAULIC 97 SERIES



SOFT CLOSE



SHH 9701 (GW) PSS
Glass to wall hinge
Material : SUS 304
Glass Thickness : 8 - 12 mm
Capacity Max : 60 Kg / pairs

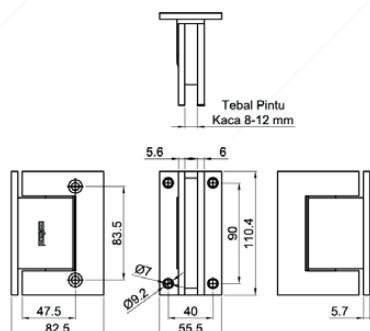

SHH 9703 (GG) PSS
Glass to Glass hinge
Material : SUS 304
Glass Thickness : 8 - 12 mm
Capacity Max : 60 Kg / pairs

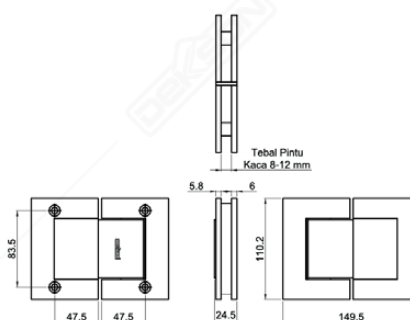

SHOWER HINGE HYDRAULIC 88 SERIES



SOFT CLOSE



SHH 8801 (GW) PSS
Glass to wall hinge
Material : SUS 304
Glass Thickness : 8 - 12 mm
Capacity Max : 45 Kg / pairs





Available color :
SHH 8801 (GW) MATT BLACK

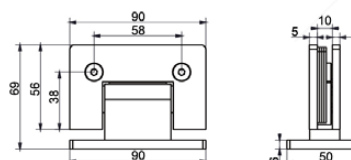

SHH 8803 (GG) PSS
Glass to Glass hinge
Material : SUS 304
Glass Thickness : 8 - 12 mm
Capacity Max : 45 Kg / pairs



Available color :
SHH 8803 (GG) MATT BLACK



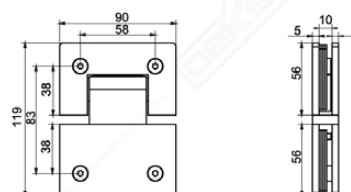




LSH S9801 (GW) 90° CHROME POLISH

Available : • Satin Brass
• Brush Gun Metal




Material : Brass
Glass Thickness : 10 & 12 mm
Capacity Max : 65 Kg / pairs



LSH S9802 (GW) 90° BRUSH GUN METAL

Available : • Satin Brass
• Chrome Polish



Material : Brass
Glass Thickness : 10 & 12 mm
Capacity Max : 65 Kg / pairs



LSH S9803 (GG) 180° SATIN BRASS

Available : • Brush Gun Metal
• Chrome Polish




Material : Brass
Glass Thickness : 10 & 12 mm
Capacity Max : 65 Kg / pairs



LSH S9804 (GG) 90° CHROME POLISH

Available : • Satin Brass
• Brush Gun Metal




Material : Brass
Glass Thickness : 10 & 12 mm
Capacity Max : 65 Kg / pairs



LSH S9805 (GG) 135° BRUSH GUN METAL

Available : • Chrome Polish
• Satin Brass

Material : Brass
Glass Thickness : 10 & 12 mm
Capacity Max : 65 Kg / pairs






GLASS CLIP - S SERIES



LGC S980 (GW) 90° BRUSH GUN METAL

Available : • Satin Brass
• Chrome Polish




Material : Brass
Glass Thickness : 10 & 12 mm



LGC S980 (GG) 90° SATIN BRASS

Available : • Chrome Polish
• Brush Gun Metal

Material : Brass
Glass Thickness : 10 & 12 mm



SHOWER HINGE LUXURIOUS - T SERIES




LUXURIOUS
SERIES



LSH T9701 (GW) 90° CHROME POLISH

Available : • Satin Brass
• Brush Gun Metal



Material : Brass
Glass Thickness : 10 & 12 mm
Capacity Max : 50 Kg / pairs



LSH T9702 (GW) 90° CHROME POLISH

Available : • Satin Brass
• Brush Gun Metal



Material : Brass
Glass Thickness : 10 & 12 mm
Capacity Max : 50 Kg / pairs



LSH T9703 (GG) 180° BRUSH GUN METAL

Available : • Satin Brass
• Chrome Polish

Material : Brass
Glass Thickness : 10 & 12 mm
Capacity Max : 50 Kg / pairs







**LSH T9704 (GG) 90°
CHROME POLISH**

Available : • Satin Brass
• Brush Gun Metal


Material : Brass
Glass Thickness : 10 & 12 mm
Capacity Max : 50 Kg / pairs

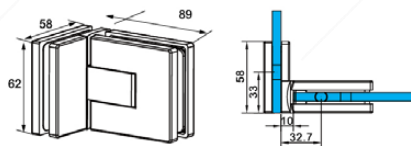

**LSH T9705 (GG) 135°
SATIN BRASS**

Available : • Chrome Polish
• Brush Gun Metal

Material : Brass
Glass Thickness : 10 & 12 mm
Capacity Max : 50 Kg / pairs






GLASS CLIP - T SERIES



**LGC T970 (GG) 90°
BRUSH GUN METAL**

Available : • Chrome Polish
• Satin Brass



Material : Brass
Glass Thickness : 10 & 12 mm



**LGC T970 (GW) 90°
SATIN BRASS**

Available : • Chrome Polish
• Brush Gun Metal

Material : Brass
Glass Thickness : 10 & 12 mm



SHOWER HINGE 93 SERIES

Capacity max : 50kg/pair





HEAVY DUTY

SH 9301 (GW) CP

Glass to wall hinge

Material : Brass
Glass Thickness : 8-12mm





HEAVY DUTY

SH 9303 (180) CP

Glass to glass 180° hinge

Material : Brass
Glass Thickness : 8-12mm





SHOWER HINGE 82 SERIES



SH MF8201 SSS

Glass to wall hinge

Material : Stainless Steel SUS 304
Glass Thickness : 8-10mm





SHOWER HINGE 83 SERIES



SH 8331 CP

Floor to glass hinge

Material : Brass
Glass Thickness : 8-10mm



SHOWER HINGE 77 SERIES



SH 7701 (GW) CP
Glass to wall hinge
Material : Brass
Glass Thickness : 8-10mm
Capacity Max : 45 Kg / pairs

Available color :





SH 7701 (GW) MATT BLACK





SH 7701 (GW) GUN METAL



SH 7701 (GW) BLACK PEARL



SH 7702 (GW) CP
Glass to wall hinge
Material : Brass
Glass Thickness : 8-10mm
Capacity Max : 45 Kg / pairs





SH 7703 (180) CP
Glass to glass 180° hinge
Material : Brass
Glass Thickness : 8-10mm
Capacity Max : 45 Kg / pairs



Available color :





SH 7703 (180) MATT BLACK



SH 7704 (90) CP
Glass to glass 90° hinge
Material : Brass
Glass Thickness : 8-10mm
Capacity Max : 45 Kg / pairs



SH 7704T CP
Material : Brass
Glass Thickness : 8-10mm
Capacity Max : 45 Kg / pairs


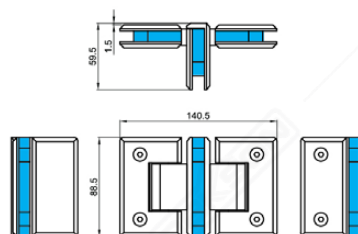


SH 7705 (135) CP
Glass to glass 135° hinge
Material : Brass
Glass Thickness : 8-10mm
Capacity Max : 45 Kg / pairs

Available color :



SH 7705 (135) MATT BLACK



SHOWER HINGE 54 SERIES



SH 5401 (GW) PSS

Glass to wall fixed hinge
Material : Stainless Steel SUS 304
Glass Thickness : 8-10mm

Available color :



SH 5401 (GW) MATT BLACK





SH 5403 (GG) 180 PSS

Glass to glass 180° hinge
Material : Stainless Steel SUS 304
Glass Thickness : 8-10mm

Available color :



SH 5403 (GG) MATT BLACK

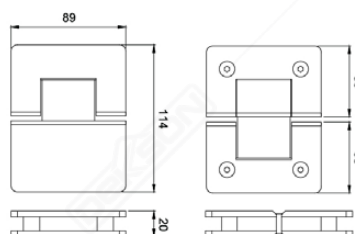

SHOWER HINGE 53 SERIES



SH 5301 (GW) PSS

Glass to wall fixed hinge
Material : Stainless Steel SUS 304
Glass Thickness : 8-10mm

Available color :



SH 5301 (GW) MATT BLACK





SH 5303 (GG) 180 PSS

Glass to glass 180° hinge
Material : Stainless Steel SUS 304
Glass Thickness : 8-10mm

Available color :





SH 5303 (GG) MATT BLACK



SH 5305 (GG) 135 PSS


Glass to glass 135° hinge
Material : Stainless Steel SUS 304
Glass Thickness : 8-10mm



SLIDING SHOWER



SS8490 ACC PSS

MATERIAL : STAINLESS STEEL SUS 304

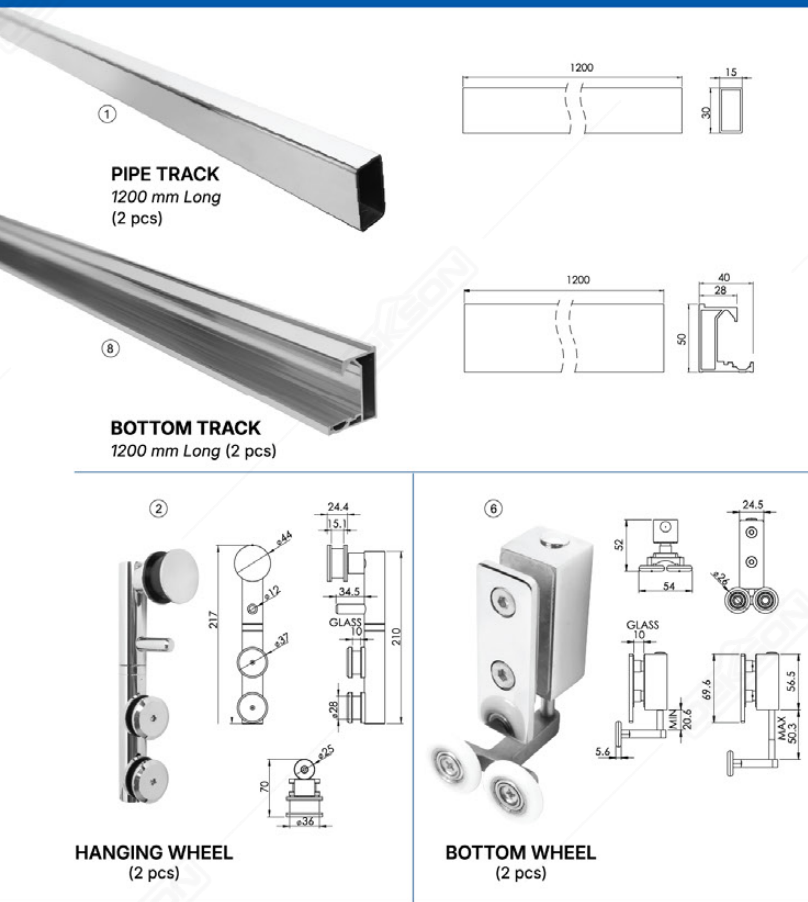


ILLUSTRATIONS

Capacity Max : 90 Kg
Glass Thickness : 10 mm

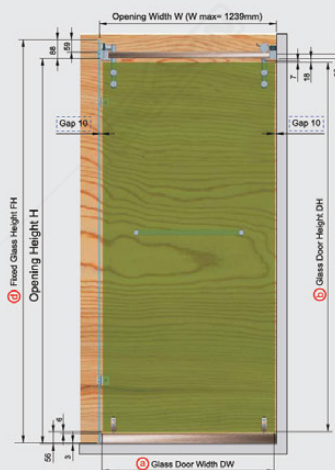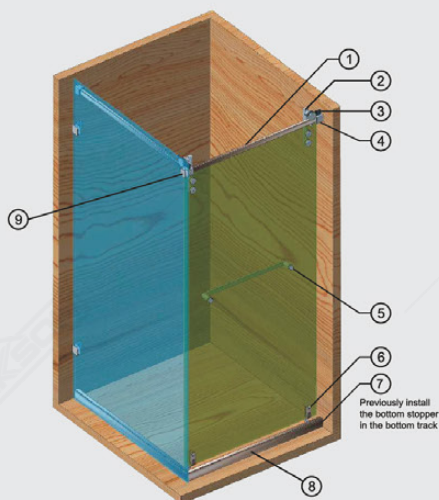


SLIDING SHOWER


SD S001 COMP + TRACK

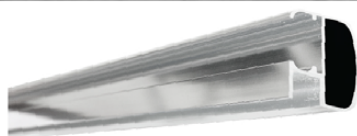


TOP TRACK
SD S001-01A
2000 mm Long (1 pc)




DOOR KNOB
SD S001-07 (1 pc)




FLOOR GUIDE
SD S001-03 (1 pc)




KNOB CLAMP ROLLER
SD S001-04 (2 pcs)




ROLLER STOPPER
SD S001-03 A (2 pcs)



MOUNTING BRACKET
SD S001-02A (2 pcs)




TRACK CONNECTING
SD S001-02 90 DEGREE





*To be order separately

ILLUSTRATIONS

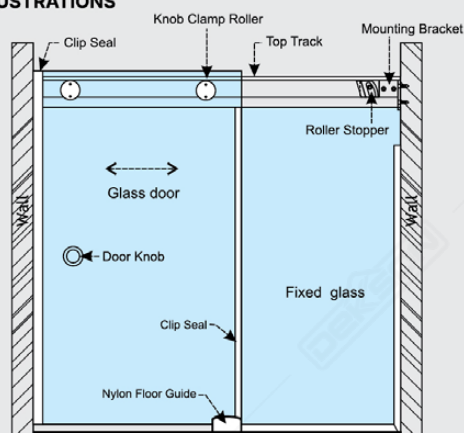










Capacity Max : 50 kg
Glass Thickness : 8 ~ 10 mm
Height Max : 2100 mm

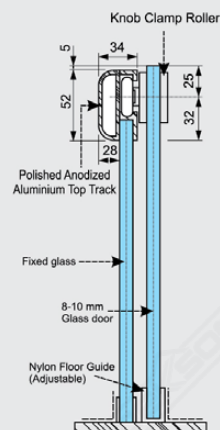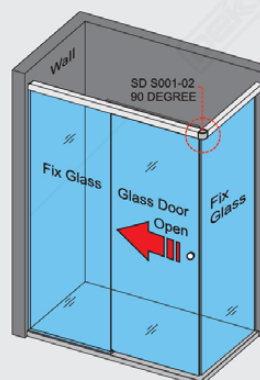


SLIDING SHOWER

SS02 ACC PSS


MATERIAL : STAINLESS STEEL SUS 304



ILLUSTRATIONS

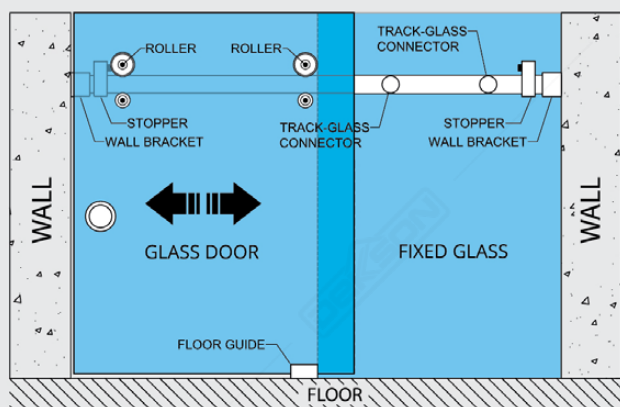

Capacity Max : 65 kg
Glass Thickness : 8 ~ 10 mm
Height Max : 2000 mm

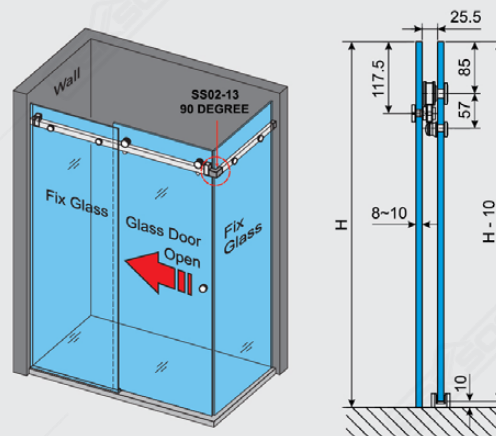

SLIDING SHOWER

SOFT (OPEN+CLOSE) SS816

SLIDING SHOWER GLASS DEKSON SS816 (WW) CP

Available color : ORB



TOP ROLLER
(2 pcs)



HANDLE
(1 pc)



180° GLASS TO SLIDING TRACK CONNECTOR
(2 pcs)



WALL MOUNT BRACKET
LEFT OR RIGHT



THRESHOLD HOLDER TO WALL
LEFT OR RIGHT



FLOOR GUIDE
LEFT OR RIGHT



90° GLASS TO SLIDING TRACK CONNECTOR
LEFT OR RIGHT



THRESHOLD HOLDER TO GLASS
LEFT OR RIGHT

SLIDING SHOWER GLASS DEKSON SOFT (CLOSE+OPEN) SS816 TRACK CP

Available color : ORB



KIT FOR SOFT CLOSING
(2 pcs)



CLIP SEAL (1934 MM)
(1 pc)



THRESHOLD (640 MM)
(1 pc)





U-CANNEL FOR FIX GLASS
(2000 MM + 573 MM)
(2 pcs)




UPPER TRACK + COVER (1230 MM)
(1 pc)



ILLUSTRATION

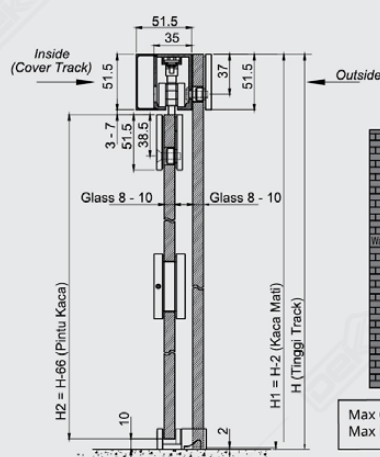

LEFT TO OPEN WALL TO GLASS
Available : RIGHT

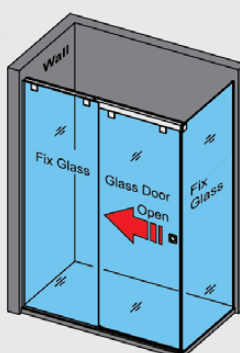

RIGHT TO OPEN WALL TO WALL
Available : LEFT

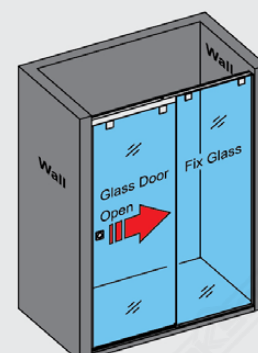

CUBICAL SYSTEM FOR TOILET

For Offices and Public Spaces

A comfortable toilet in public spaces is not only needed, but expected. Dekson cubical system set for toilet provides an all-in package that includes every architectural hardware needed to support a modern toilet cubicle. From the cubical stand to glass clip, everything is manufactured to last for a long period of time.



OTHER ACCESSORIES

①



GC 018 (GW) PSS

②



GC 018 (GG) PSS

③



SH 5303 (GG) 180 PSS
Material : SUS 304

④



KT SOLID 304 (160MM) SSS

⑤



IL 8620 CP + 861C CP KEEPER

⑥



GH 25-01 CP

⑦



GH 25-02 CP

⑧



GH 25-05 CP

⑨



GH 25-04 CP

⑩





PH DL814 25X(475/175)X(450X150) PSS
Material : SUS 304

⑪



DK AL82803 CP
Material : Aluminium

ILLUSTRATIONS

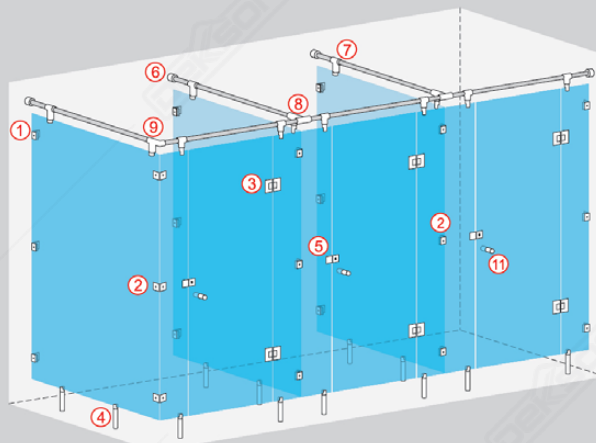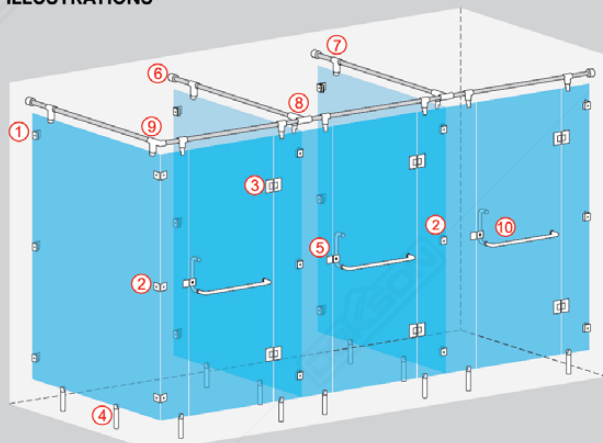


CUBICAL TOILET



CUBICAL TOILET
KT 304 (1600 MM) HD SSS

Glass to floor applications


Glass Thickness : 8 - 10 mm
Material : Stainless Steel SUS 304

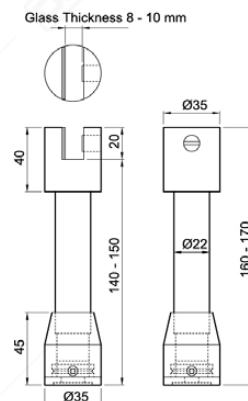

CUBICAL TOILET
CT 001 (8-10MM) SSS

Glass to floor applications

Available Color : PSS
Glass Thickness : 8 - 10 mm
Material : Stainless Steel SUS 304

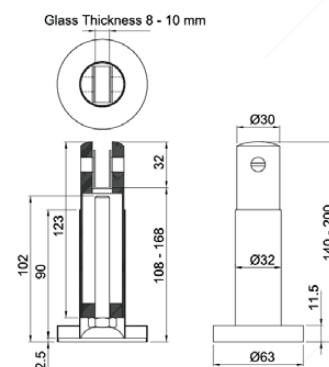


GLASS HOLDER




GLASS HOLDER
GH 19-01 CP

Material : Brass




GLASS HOLDER
GH 19-02 CP


Glass Thickness : 8 - 10 mm
Material : Brass



GLASS HOLDER
GH 19-03 CP


Material : Brass

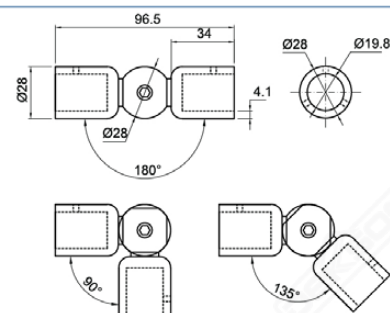




**GLASS HOLDER
GH 25-01 CP**

Material : Brass




**GLASS HOLDER
GH 25-02 CP**

Material : Brass




**GLASS HOLDER
GH 25-03CP**

Glass Thickness : 8 - 10 mm
Material : Brass



**GLASS HOLDER
GH 25-04 CP**

Glass Thickness : 8 - 10 mm
Material : Brass

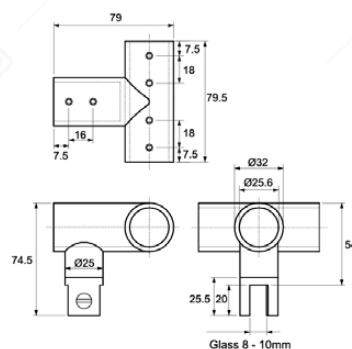


**GLASS HOLDER
GH 25-05CP**


Glass Thickness : 8 - 10 mm
Material : Brass

GLASS CLIP




**GLASS CLIP
GC Z-15G CP**
Glass to wall applications
Glass Thickness : 3 - 8 mm
Material : Zinc Alloy



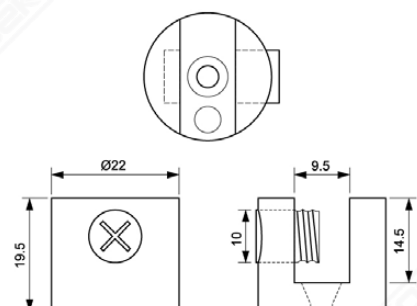





GLASS CLIP
GC BL002 SN
 Glass to wall applications
 Glass Thickness : 3 - 8 mm
 Material : Zinc Alloy

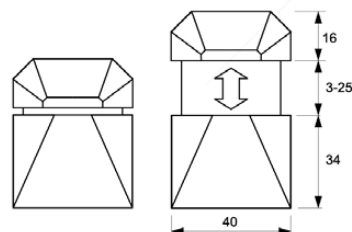

GLASS CLIP
GC BL003 SN
 Glass to wall applications
 Glass Thickness : 3 - 8 mm
 Material : Zinc Alloy



GLASS CLIP
GC D009 SN
 Glass to wall applications
 Glass Thickness : 3 - 8 mm
 Material : Zinc Alloy


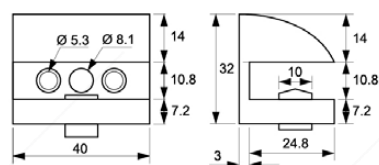


GLASS CLIP
GC U8541 PSS
 Glass to wall applications
 Material : Stainless Steel SUS 304


Available color :



GC U8541 MATT BLACK



GLASS CLIP
GC U800 AL CP
 Glass to floor applications
 Material : Aluminium

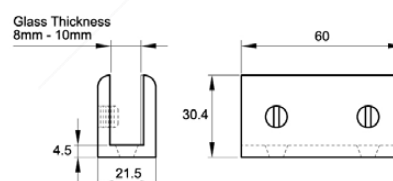




**GLASS CLIP
U820 PSS**

Glass to wall applications



Glass Thickness : 10 - 12 mm
Material : Stainless Steel SUS 304

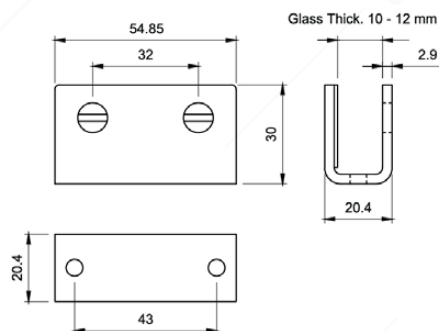

**GLASS CLIP
GC 018 (GW) PSS**

Glass to wall applications



Glass Thickness : 10 - 12 mm
Material : Stainless Steel SUS 304



**GLASS CLIP
GC 018 (GG) PSS**

Glass to glass applications

Glass Thickness : 10 - 12 mm
Material : Stainless Steel SUS 304



**GLASS CLIP
GC 832 CP**



Glass to glass applications

Glass Thickness : 8 - 12 mm
Material : Brass

Available color :





GC 832 CP MATT BLACK



**GLASS CLIP
GC 833 CP**

Glass to wall applications

Glass Thickness : 8 - 12 mm
Material : Brass





STAIRCASE RAILING


MATERIAL : STAINLESS STEEL SUS 304



SCG 01 DOUBLE SSS

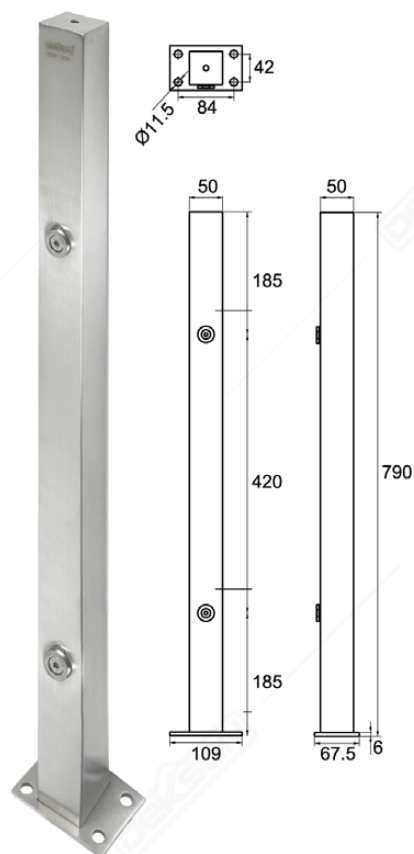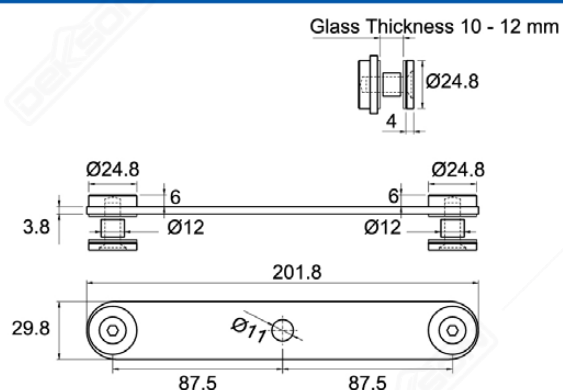


SCR 04 830 SSS

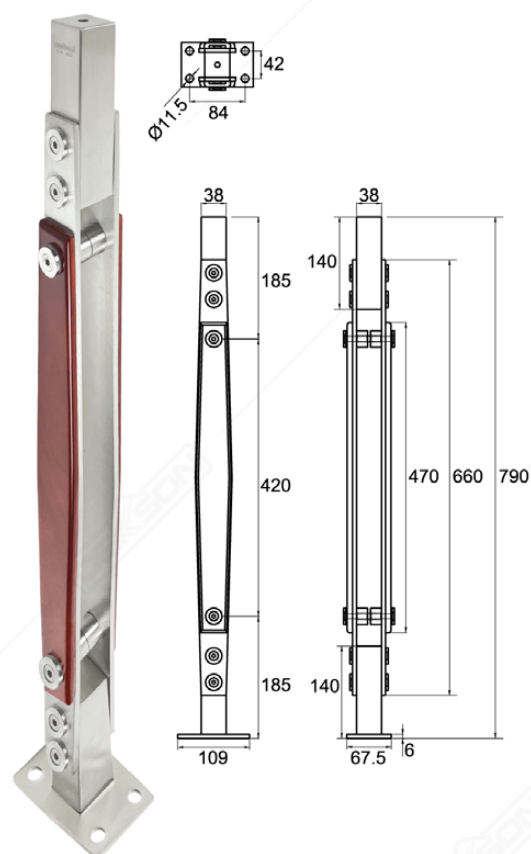


SCR 36 830 SSS+WOOD




SCG 01 SINGLE SSS

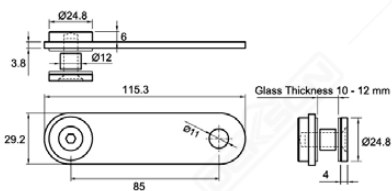


SCH 0312 RW STRAIGHT SSS
Available: SCH 0312 RW OVAL SSS




SCH 01 OVAL SSS



SCH 01 STRAIGHT SSS




GLASS HOLDER BANISTER
GH 14-01 OVAL SSS
Available: GH 14-01 STRAIGHT SSS



GC ST001 SSS


Available : GC ST001 MATT BLACK
Glass Thickness : 10 - 17 mm
Material : Stainless Steel SUS 304

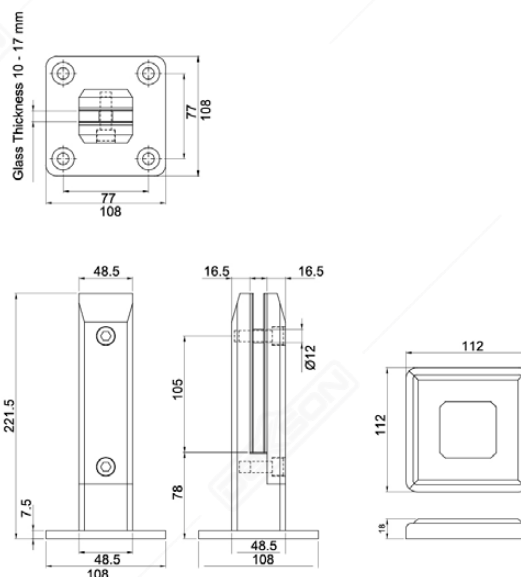


MOHAIR




MOHAIR SIL
0.48X0.9X250M BLACK*




MOHAIR SIL
0.69X0.7X200M BLACK*



SMALL MOHAIR SIL
0.69X0.5X200M GREY
Available : BLACK





BIG MOHAIR SIL
1.1X0.7X175M BROWN
Available : BLACK, GREY





CLIP SEAL MAGNETIC CS 100

10x2.2M (90/180) WH




CLIP SEAL MAGNETIC CS 110

10x2.2M (135/180) WH




CLIP SEAL CS 8910

10x2.2M OVAL




CLIP SEAL CS 8920


10x2.2M OVAL




CLIP SEAL CS BS 2.2M



CLIP SEAL CS SS 2.2M




CLIP SEAL CS OW 2.2M



CLIP SEAL WITH BRUSH CSB 001


10x2.2M OVAL*

Available : 12x2.2M*




CLIP SEAL CS SS

(10/12MM) 2.5M*



CLIP SEAL BS


(10/12MM) 2.5M*



CLIP SEAL WITH BRUSH CSB 002

10x2.2M OVAL*

Available : 12x2.2M*
12x3M*



GLASS CUTTER




GCT 312


GLASS SUCTION



GSC 1S
Max Capacity : 75 kg

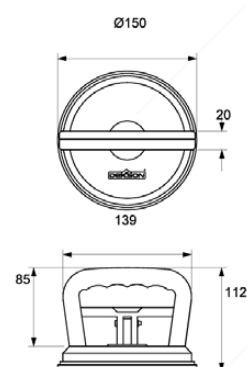


GSC 3S

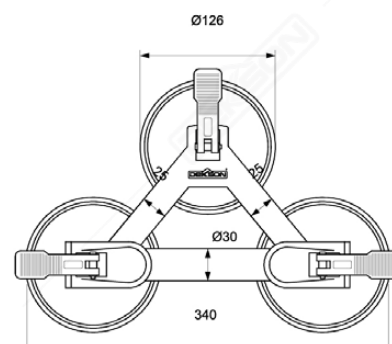


ILLUSTRATIONS


VERTICAL

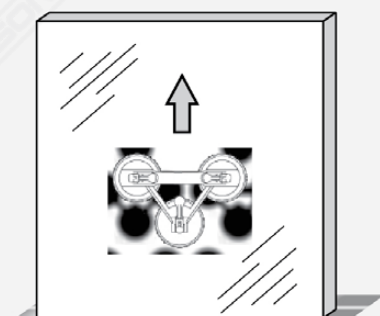


MAX CAPACITY : 150 KG



HORIZONTAL



MAX CAPACITY : 130 KG



SILICONE SEALANT

Every great finish starts with a reliable seal. Dekkson Silicone Sealant offers superior adhesion, excellent elasticity, and long-term protection against water and weather damage. Perfect for both interior and exterior use, it delivers a neat, professional result for every project.

SILICONE

DEKKSON NEUTRAL SILICONE SEALANT

DESCRIPTION :

Dekkson Neutral Silicone Sealant is one part sealant that offer excellent adhesion, weatherability and elasticity for general glazing and for sealing application.

APPLICATIONS :

General Glazing : Masonry, Concrete, Ceramics, Stone, Glass, Aluminium, Most Plastic, Wood, Brick, Zincalume, Galvanized Iron.

General Sealing : Containers, Automobiles, Rain Water Goods, Roofing, Joints in Building and Civil Engineering.

DIY Applications : Gutter, Air-Conditioning, Sanitary, Car, Boat and Other Marine Industry uses.

Electronics Sealing : As Sealants in The Electrical and Electronics Industry.


SPECIFICATION :

Curing System	: Neutral (Oxime)
Appearance	: Non-Sagging Paste
Odour	: Low Oxime Smell
Specific Gravity	: 1.03 ± 0.05
Shore A Hardness	: 24 Approx.
Elongation	: 400% Approx.
Tensile Strength	: 1.20 MPa Approx.
Tack free Time	: Within 15 Minutes
Application Temp.	: -20°C to 50°C
Service Temp.	: -50°C to 150°C
Self Life	: 12 Months
Netto	: 300 ml
Color	: Clear, BK, DB, White, Light Grey


- * Joint Size Minimum 3 mm x 3 mm
- * Joint Size Maximum 30 mm



Concrete



Ceramics




Stone



Glass



Aluminium



Zincalume



Wood



Brick

DEKKSON EXTENDED SILICONE SEALANT

DESCRIPTION :

Dekkson Extended Sealant is one part sealant that offer excellent adhesion, weatherability and elasticity for general glazing and for sealing application.

APPLICATIONS :

General Glazing : Glass, Plastic, Channel or Stop.

Curtain Wall Sealing : Glass, Steel, Granite, and Plastic.

General Sealing : Sheet Metal, Skylights, Ventilators, Air-Conditioning

SPECIFICATION :

Curing System	: Acetoxo
Appearance	: Non-Sagging Paste
Odour	: Vinegar Smell
Specific Gravity	: 0.96 ± 0.05
Shore A Hardness	: 18 to 26 Approx.
Elongation	: 300% Approx.
Tensile Strength	: 1.4 MPa Approx.
Tack free Time	: 15 Minutes
Application Temp.	: -20°C to 50°C
Service Temp.	: -40°C to 100°C
Self Life	: 12 Months
Netto	: 300 ml
Color	: Clear, BK, Brown, White, Light Grey


- * Joint Size Minimum 3 mm x 3 mm
- * Joint Size Maximum 30 mm




Plastic



Granite



Sheet Metal



Ventilators



Air-Conditioning



Channel or Stop



Glass



Skylights



SILICONE DKS 8793 ST (STRUCTURAL)

DESCRIPTION :

DKS-8793 ST SILICONE is a high performance, 100% neutral silicone architectural grade silicone rubber, designed specifically for structural bonding and protective glazing applications.

APPLICATIONS :

Structural bonding and glazing of curtain wall.


SPECIFICATION :

Curing System	: Neutral (Oxime)
Appearance	: Non-Sagging Paste
Odour	: Low Oxime Smell
Specific Gravity	: Clear 1.00 g/cm ³ and Coloured 1.37 g/cm ³
Shore A Hardness	: 48 Approx.
Elongation	: 200% Approx.
Tensile Strength	: 1.20 MPa Approx.
Tack free Time	: 30 Minutes
Application Temp.	: -4°C to 40°C
Service Temp.	: -27°C
Self Life	: 12 Months
Netto	: 300 ml
Color	: Clear, Black, White, Light Grey


- * Joint Size Minimum 3 mm x 3 mm
- * Joint Size Maximum 30 mm



Structural




Curtain Wall



ACP




Aluminium Window



Spider Fitting



Concrete



Brick



Skylights



CONSTRUCTION ADHESIVE CA-803


DESCRIPTION :

is a versatile general purpose construction adhesive suitable for bonding a wide variety of building materials for internal and external applications.

SPECIFICATION :

Appearance	: Thixotropic paste like consistency
Solids Content	: Approx. 75%
Open Time (Reposition)	: 10 to 30 minutes depending on temperature and method of application
Sag Resistance (AS2329-1999)	: < 4mm
Specific Gravity	: 1.12±0.02
Maximum Bond Strength	: Generally between 48 to 72 hours depending on application.
Shear Bond Strength (AS2329-1999)	: >2.6Mpa (after 24 hours)
VOC	: 310g/L
Netto	: 300ml
Color	: Cream


- * Joint Size Minimum 3 mm x 3 mm
- * Joint Size Maximum 30 mm



Frame



PVC




Wallpaper



Glass




Mirror



Metal



Wood



Brick



SILICONE DKS SAUSAGE NEUTRAL 8610

DESCRIPTION :

Dekkson Neutral Silicone Sealant is one part sealant that offer excellent adhesion, weatherability and elasticity for general glazing and for sealing application.

SPECIFICATION :

Curing System	: Neutral (Oxime)
Appearance	: Non-Sagging Paste
Odour	: Low Oxime Smell
Specific Gravity	: 1.03 ± 0.05
Shore A Hardness	: 24 Approx.
Elongation	: 400% Approx.
Tensile Strength	: 1.20 MPa Approx.
Tack free Time	: Within 15 Minutes
Application Temp.	: -20°C to 50°C
Service Temp.	: -50°C to 150°C
Self Life	: 12 Months
Netto	: 600 ml
Color	: Clear, Black, Brown, Dark Brown, White, Light Grey

- * Joint Size Minimum 3 mm x 3 mm
- * Joint Size Maximum 30 mm



Excellent UV Resistance



Excellent Weather Resistance



Good Adhesion



Concrete



Ceramics



Stone




Glass




Aluminium



Zincalume



Wood



Brick



SILICONE DKS 8793 ST (STRUCTURAL)

DESCRIPTION :

DKS-8793 ST SILICONE is a high performance, 100% neutral silicone architectural grade silicone rubber, designed specifically for structural bonding and protective glazing applications.

SPECIFICATION :

Curing System	: Neutral (Oxime)
Appearance	: Non-Sagging Paste
Odour	: Low Oxime Smell
Specific Gravity	: Clear 1.00 g/cm³ and Coloured 1.37 g/cm³
Shore A Hardness	: 48 Approx.
Elongation	: 200% Approx.
Tensile Strength	: 1.20 MPa Approx.
Tack free Time	: 30 Minutes
Application Temp.	: -4°C to 40°C
Service Temp.	: -27°C
Self Life	: 12 Months
Netto	: 600 ml
Color	: Clear, Black, White, Dark Grey, Light Grey

- * Joint Size Minimum 3 mm x 3 mm
- * Joint Size Maximum 30 mm



Excellent UV Resistance



Excellent Weather Resistance



Superior Adhesion




No Staining



No Fungus



Structural




Curtain Wall




ACP




Aluminium Window



Spider Fitting



Concrete



Brick



Skylights



MODIFIED SEALANT POLYMER MSP 8815

DESCRIPTION :

MSP 8815 is a premium, high-performance multipurpose sealant offering superior adhesion, excellent flexibility, and long-lasting durability. Suitable for interior and exterior use, it is ideal for interior decoration, automotive applications, swimming pool tile bonding, decorative panel installation, and wall systems. It provides excellent adhesion to sanitary ware (basins, toilets), metal, natural stone, wood, concrete, plastic, PVC, ceramic tiles, and other composite materials.

SPECIFICATION :

Odour	: Low odor / Slight alcohol-like smell
Specific Gravity	: 1.46-1.49 g/cm³
Shore A Hardness	: 46 ±2
Elongation	: 200% Approx.
Tensile Strength	: 2.6 MPa Approx.
Tack free Time	: 20 Minutes
Application Temp.	: +4°C to +45°C
Self Life	: 12 Months
Netto	: 600 ml
Color	: Black, White, Light Grey

- * Joint Size Minimum 5 mm x 5 mm
- * Joint Size Maximum 30 mm



Excellent Adhesion



Paintable




Mold Resistant



No Staining



Eco Friendly




Interior Decoration




Sanitary Ware



Decorative Wall



Ceramic Tiles



Mirror



Stainless Steel

SILICONE GUN



SILICONE GUN 8600
For Silicone Sausage Pack Only



SILICONE GUN 8200
For Silicone Cartridge Tube Pack Only



AVAILABLE AT :

